


Features

- Compact design
- Solid construction
- 3M adhesive
- Easy tabs for speaker connection

Applications

- Limited space applications
- Easy to incorporate into designs
- Flat panel speakers
- Consumer electronics

Impedance Plot

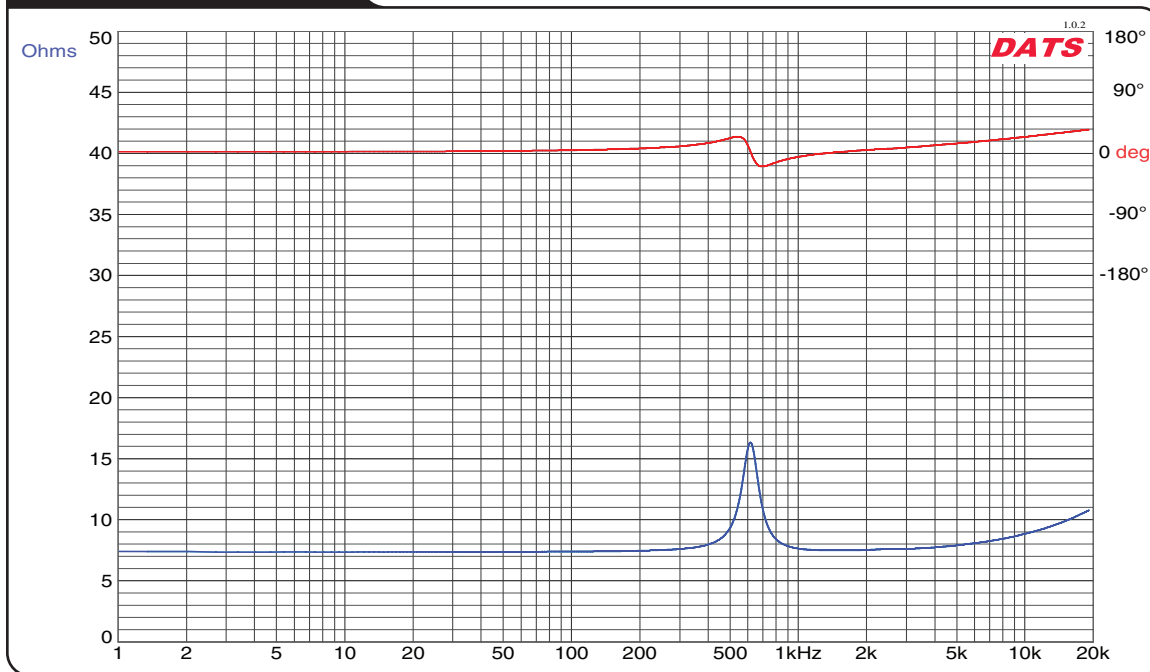

Parameters

Impedance (Ω)	8
Re (Ω)	7.3
Le (mH) @ 1 kHz	0.08
Fs (Hz) - Uncoupled	616
Qms	—
Qes	—
Qts	2.63
Mms (g)	0.20
Cms (mm/N)	0.0003
Sd (cm ²)	—
Vd (cm ³)	—
BL (Tm)	1.15
VAS (liters)	—
XMAX (mm)	—
VC Diameter (mm)	13
Net Weight (g)	12.5
RMS Power Handling (W)	3
Usable Frequency Range (Hz)	*