

15CXA400Fe

COAXIAL TRANSDUCER

KEY FEATURES

- Program power: 800 / 160 W_{AES} (LF / HF)
- Sensitivity: 98 / 105 dB (1W / 1m) (LF / HF)
- 4" voice coil woofer
- 2.85" voice coil compression driver
- Common ferrite magnet system design

- Demodulating rings in both LF and HF units
- Composite Titanium / Polyester HF diaphragm
- Weatherproof LF cone
- 60° coverage horn for HF dispersion control





TECHNICAL SPECIFICATIONS

Nominal diameter	380 mm		15 in
Rated impedance (LF/HF)			8 / 16 Ω
Minimum impedance (LF/HF)		6,	3 / 11,3 Ω
Power capacity 1 (LF/HF)		400 /	80 W _{AES}
Program power ² (LF/HF)		80	0 / 160 W
Sensitivity (LF/HF 3)	98 dB	1W /	1m @ Z _N
	105 dB	1W /	1m @ Z _N
Frequency range		40 - 2	20.000 Hz
Recom. HF crossover	1,5 kHz or higher (12 dB/oct min slope)		
Voice coil diameter (LF/HF)	101,6	mm 3	4 in
	72,4	l mm	2,85 in
BI factor			18,2 N/A
Moving mass			0,090 kg
Voice coil length			16 mm
Air gap height			10 mm
X _{damage} (peak to peak)			51 mm

THIELE-SMALL PARAMETERS 4

Resonant frequency, f _s	40 Hz
D.C. Voice coil resistance, R _e	6,3 Ω
Mechanical Quality Factor, Q _{ms}	16,4
Electrical Quality Factor, Q _{es}	0,43
Total Quality Factor, Q _{ts}	0,42
Equivalent Air Volume to C _{ms} , V _{as}	191 I
Mechanical Compliance, C _{ms}	175 μm / N
Mechanical Resistance, R _{ms}	1,4 kg / s
Efficiency, η ₀	2,75 %
Effective Surface Area, S _d	0,088 m ²
Maximum Displacement, X _{max} ⁵	6 mm
Displacement Volume, V _d	350 cm ³
Voice Coil Inductance, L _e	1 mH

Notes

¹ The power capaticty is determined according to AES2-1984 (r2003) standard.

² Program power is defined as power capacity + 3 dB.

³ Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 7 kHz


⁴ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

 $^{^{6}}$ The X_{max} is calculated as $(L_{vc} - H_{ag})/2 + (H_{ag}/3,5)$, where L_{vc} is the voice coil length and H_{ag} is the air gap height.




15CXA400Fe

COAXIAL TRANSDUCER

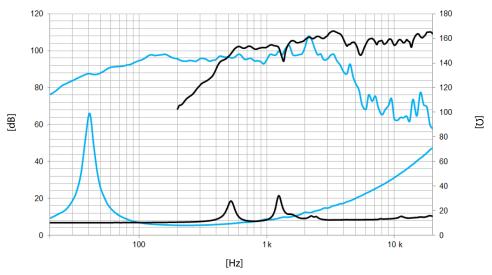


Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

FILTERED FREQUENCY RESPONSE

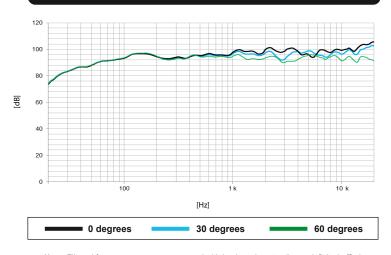

Note: Filtered frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m using filter FD-2XA

POLAR PATTERN

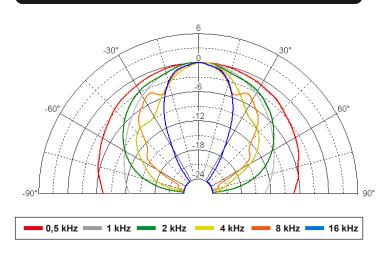

MOUNTING INFORMATION

Overall diameter	388 mm	15,3 in
Bolt circle diameter	370 mm	14,6 in
Baffle cutout diameter:		
- Front mount	352 mm	13,8 in
Depth	193 mm	7,6 in
Volume displaced by driver	7 I	0,25 ft ³
Net weight	11,9 kg	26,2 lb
Shipping weight	12,4 kg	27,3 lb

DIMENSION DRAWING

