

- Home
- Newsletter
- Contact us
- How to buy
- OEM systems



WF152BD03/04 6" die cast, paper cone mid/woofer, 4/8 ohm





The 6" transducers WF152BD03 (4 ohm) and WF152BD04 (8 ohm) were designed as high performance bass and midrange units for compact monitors and high-end hi-fi speakers.

[Frequency resp.](#)
[Specifications](#)
[Dimensions](#)
[Ordering info](#)



MORE INFO

 [PDF data sheet](#)
(XXXKB)

 [Balanced Drive technical paper](#)
(2.34MB)

[List of all mid/woofers](#)

[All Wavecor drive units](#)


[Technical pages](#)

FEATURES



- Balanced Drive motor structure for optimal drive force symmetry resulting in largely reduced even order harmonic distortion
- Copper cap on center pole to reduce voice coil inductance and to minimize variations in voice coil inductance as a function of voice coil position
- Black coated semi-air-dried paper cone
- Rigid die cast alu chassis with extensive venting for lower air flow speed reducing audible distortion
- Vented voice coil former for reduced distortion and compression
- Vented center pole with dual flares for reduced noise level at large cone excursions
- Heavy-duty black fiber glass voice coil former to reduce mechanical losses resulting in better dynamic performance and low-level details
- Large motor with 1¼" voice coil diameter for better control and power handling
- Built-in alu field-stabilizing ring for reduced distortion at high levels
- Low-loss suspension (high Qm) for better reproduction of details and dynamics
- Black motor parts for better heat transfer to the surrounding air
- Conex spider for better durability under extreme conditions
- Gold plated terminals to ensure long-term trouble free connection

FREQUENCY RESPONSE

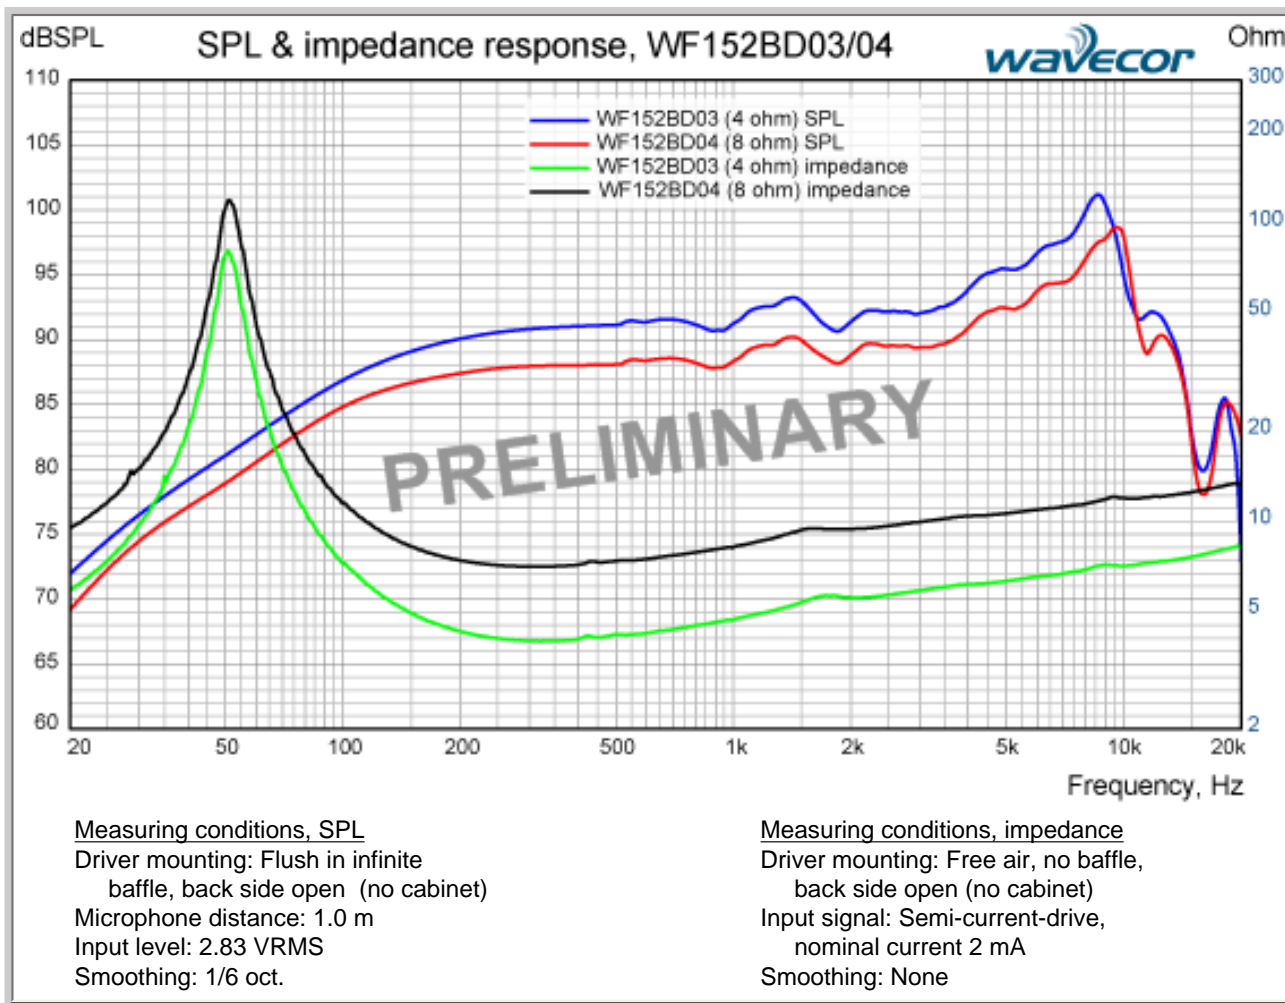

PRELIMINARY NOMINAL SPECIFICATIONS

Notes	Parameter	WF152BD03		WF152BD04		Unit
		Before burn-in	After burn-in	Before burn-in	After burn-in	
	Nominal size	6		6		[inch.]
	Nominal impedance	4		8		[ohm]
	Recommended max. upper frequency limit	3.5		3.5		[kHz]
1, 3	Sensitivity, 2.83V/1m (average SPL in range 300 - 1,000 Hz)	91		88.5		[dB]
2	Power handling, short term, IEC 268-5, no additional filtering					[W]
2	Power handling, long term, IEC 268-5, no additional filtering					[W]
2	Power handling, continuous, IEC 268-5, no additional filtering	70		70		[W]
	Effective radiating area, S_d	93		93		[sq.cm]
3, 6	Resonance frequency (free air, no baffle), F_s	50		50.5		[Hz]
	Moving mass, incl. air (free air, no baffle), M_{ms}	11.9		11.7		[g]
3	Force factor, B_{xl}	5.9		7.3		[N/A]
3, 6	Suspension compliance, C_{ms}	0.85		0.85		[mm/N]
3, 6	Equivalent air volume, V_{as}	10.4		10.4		[lit.]
3, 6	Mechanical resistance, R_{ms}	0.40		0.40		[Ns/m]
3, 6	Mechanical Q, Q_{ms}	9.4		9.3		[-]
3, 6	Electrical Q, Q_{es}	0.35		0.45		[-]
3, 6	Total Q, Q_{ts}	0.34		0.43		[-]
4	Voice coil resistance, R_{DC}	3.3		6.4		[ohm]
5	Voice coil inductance, L_e (measured at 10 kHz)	0.10		0.16		[mH]
	Voice coil inside diameter	32		32		[mm]
	Voice coil winding height	14		14		[mm]
	Air gap height	5		5		[mm]
	Magnet weight					[g]
	Total unit net weight excl. packaging					[kg]
3, 5	K_{rm}					[mohm]
3, 5	E_{rm}					[-]
3, 5	K_{xm}					[mH]
3, 5	E_{xm}					[-]

Note 1 Measured in infinite baffle.

Note 2 Tested in free air (no cabinet).


Note 3 Measured using a semi-constant current source, nominal level 2 mA.

Note 4 Measured at 20 deg. C


Note 5 It is generally a rough simplification to assume that loudspeaker transducer voice coils exhibit the characteristics of an inductor. Instead it is a far more accurate approach to use the more advanced model often referred to as the "Wright empirical model", also used in LEAP-4 as the TSL model (www.linearx.com), involving parameters K_{rm} , E_{rm} , K_{xm} , and E_{xm} . This more accurate transducer model is described in a technical paper (PDF) [here](#).

Note 6 After burn-in specifications are measured 12 hours after exiting the transducer by a 20 Hz sine wave for 2 hours at level 10/14.1 VRMS (4/8 ohm version). The unit is not burned in before shipping.

OUTLINE DRAWING AND NOMINAL DIMENSIONS (mm)

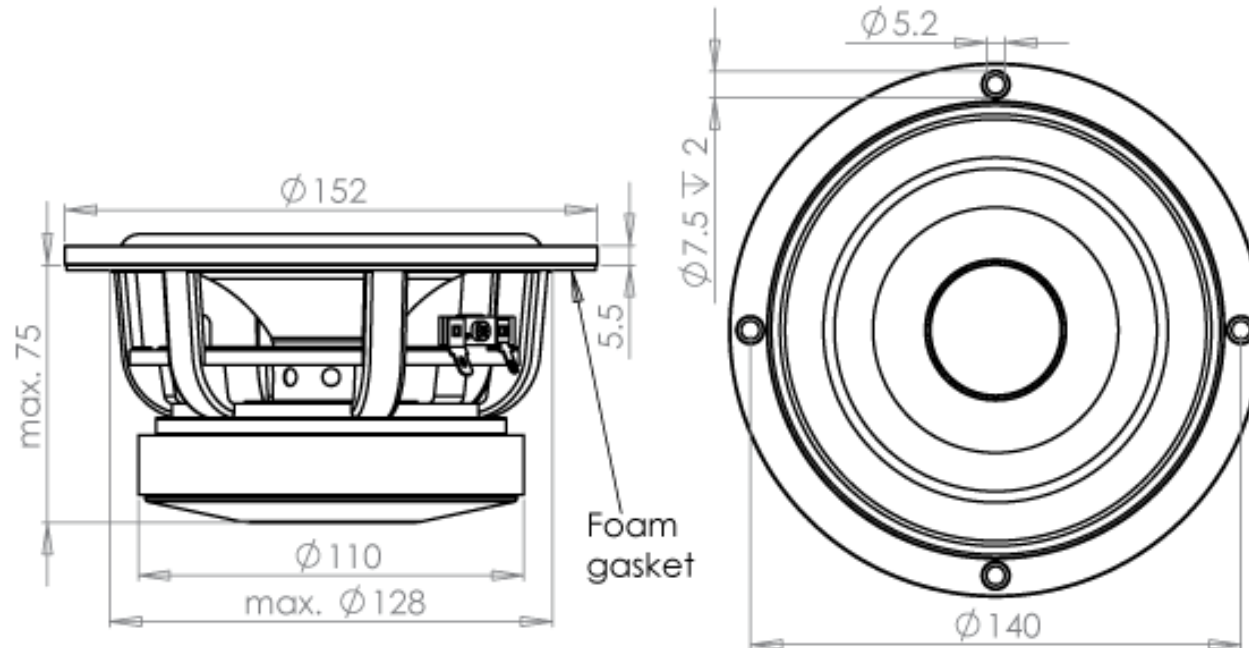

TERMINAL NOMINAL DIMENSIONS (mm)

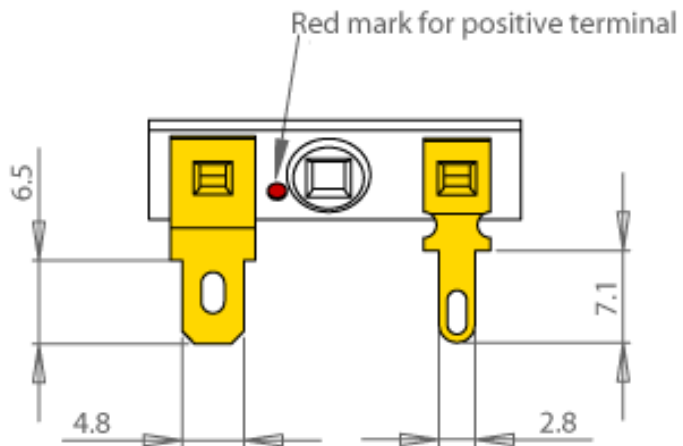

Thickness, both terminals: 0.5mm
Terminal plating: Gold

PACKAGING AND ORDERING INFORMATION

Part no. WF152BD03-01	4 ohm version, individual packaging (one piece per box)
Part no. WF152BD03-02	4 ohm version, bulk packaging
Part no. WF152BD04-01	8 ohm version, individual packaging (one piece per box)
Part no. WF152BD04-02	8 ohm version, bulk packaging

Latest update: Dec. 31, 2009

Specifications are subject to change without any further notice.
Copyright © 2006-2010 by Wavecor Ltd., Guangzhou, China. All rights reserved.