


**Features**

- Robust design for high performance applications
- Highly efficient steered magnetic flux design
- Impressive performance characteristics

**Applications**

- Commercial audio applications
- Customized sound products
- Concealed audio applications

**Impedance Plot**

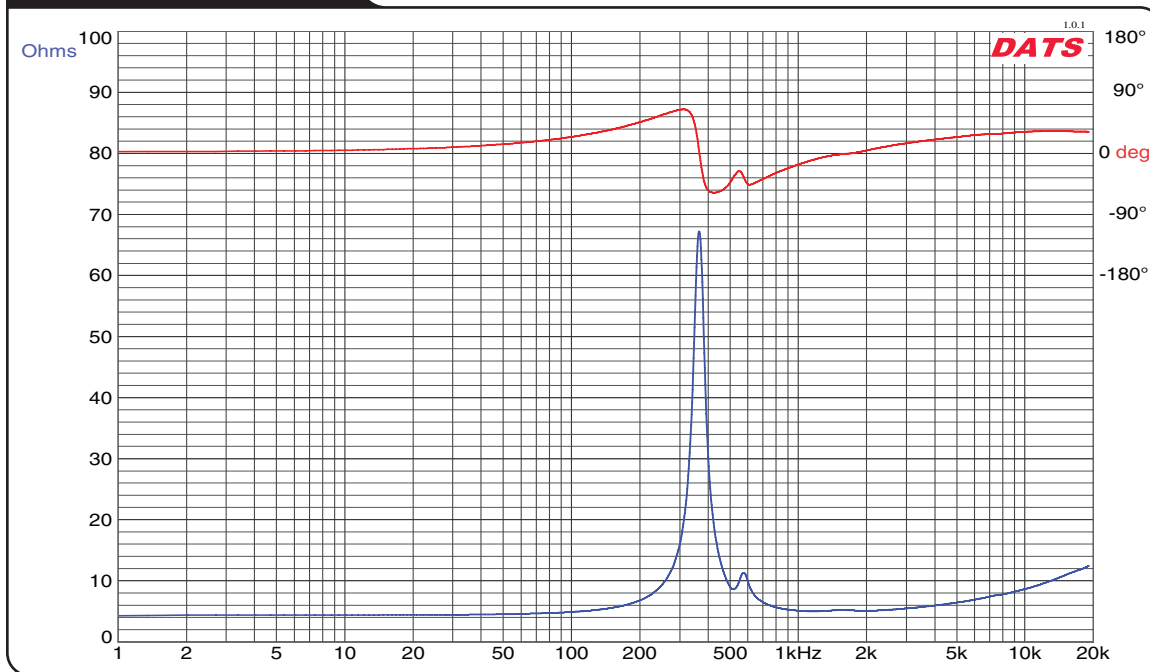

**Parameters**

Impedance ( $\Omega$ )	4
Re ( $\Omega$ )	4.3
Le (mH) @ 1 kHz	0.41
Fs (Hz) - Uncoupled	365
Qms	—
Qes	—
Qts	0.73
Mms (g)	1.3
Cms (mm/N)	0.0001
Sd (cm <sup>2</sup> )	—
Vd (cm <sup>3</sup> )	—
BL (Tm)	4.29
VAS (liters)	—
XMAX (mm)	—
VC Diameter (mm)	25
Net Weight (g)	268.2
RMS Power Handling (W)	20
Usable Frequency Range (Hz)	*