


Features

- Wideband frequency response
- 3M adhesive pads
- Great sensitivity and performance

Applications

- Hidden audio
- Automotive applications
- Point of sale

Impedance Plot

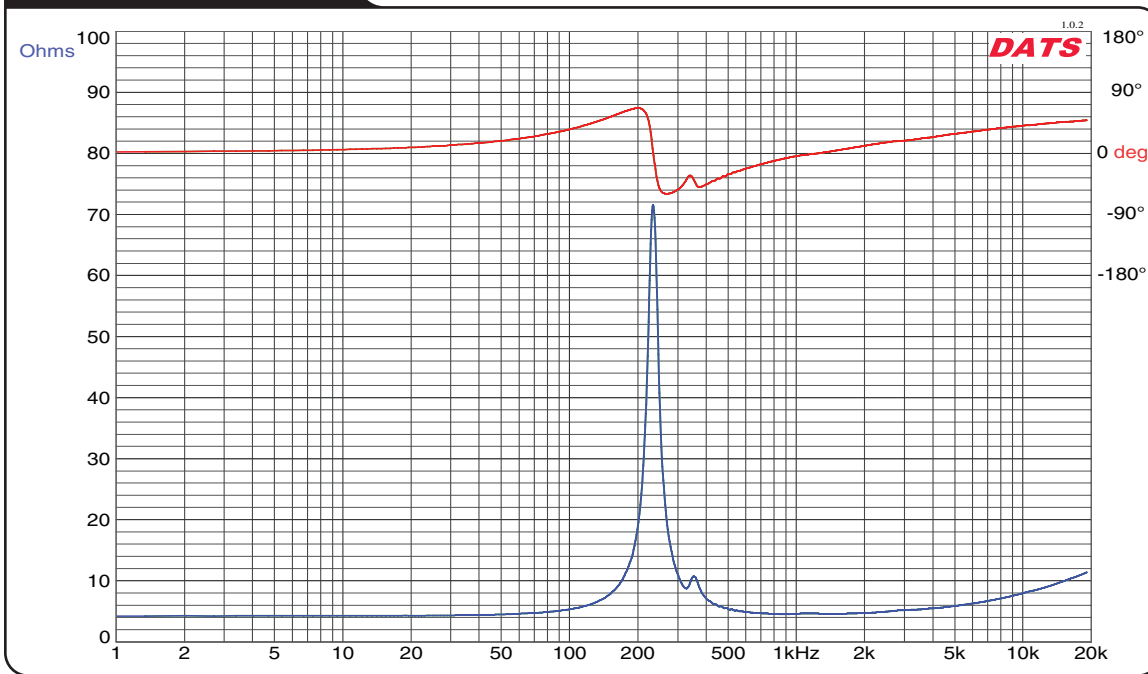

Parameters

Impedance (Ω)	4
Re (Ω)	4.2
Le (mH) @ 1 kHz	0.10
Fs (Hz) - Uncoupled	233
Qms	—
Qes	—
Qts	0.74
Mms (g)	1.75
Cms (mm/N)	0.0003
Sd (cm ²)	—
Vd (cm ³)	—
BL (Tm)	3.86
VAS (liters)	—
XMAX (mm)	—
VC Diameter (mm)	25
Net Weight (g)	82
RMS Power Handling (W)	20
Usable Frequency Range (Hz)	*