

# SPECIFICATIONS

## TW030WA11/12 30 mm textile tweeter with waveguide, 4/8 ohm

TW030WA11 and TW030WA12 are tweeters designed for the most demanding applications, where low resonance frequency, high sensitivity and power handling, controlled dispersion, and a very wide frequency range are required.

### FEATURES

- Featuring waveguide face plate for controlled dispersion, offering optimized off-axis and power response
- 30 mm voice coil design with high power handling, and low resonance frequency
- Copper clad center pole yielding very low voice coil inductance for reduced distortion and increased high frequency output
- Internal volumes for low resonance frequency and distortion
- Precision-coated textile diaphragm for improved consistency and high-frequency extension
- Optimized dome shape for ultra high frequency cutoff
- Vented voice coil former for reduced distortion and compression
- Copper-clad aluminium voice coil wire offering lower moving mass for improved efficiency and transient response
- Build-in cavities under dome/edge to equalize pressure for lower distortion and lower resonance frequency
- Flexible lead wires for higher power handling and larger excursion
- Gold plated terminals to prevent oxidation and ensure long-term reliable connection
- Delivered with foam gasket attached for hassle-free mounting and secure cabinet sealing



### NOMINAL SPECIFICATIONS

Notes	Parameter	Value		Unit
		TW030WA11	TW030WA12	
	Nominal size	30	30	[mm]
	Nominal impedance	4	8	[ohm]
	Recommended frequency range	1.5 - 25	1.5 - 25	[kHz]
1, 4	Sensitivity, 2.83V/1m (average SPL in range 5 - 20 kHz)	93.5	91	[dB]
2	Power handling, short term, IEC 268-5, 6 kHz@12dB/oct.			[W]
2	Power handling, long term, IEC 268-5, 6 kHz@12dB/oct.			[W]
2	Power handling, continuous, IEC 268-5, 6 kHz@12dB/oct.			[W]
	Effective radiating area, $S_d$	11.5	11.5	[cm <sup>2</sup> ]
3, 4, 6	Resonance frequency (free air, no baffle), $F_s$	410	425	[kHz]
	Moving mass, incl. air (free air, no baffle), $M_{ms}$	0.43	0.40	[g]
3	Force factor, $B_{xl}$	1.7	2.0	[N/A]
3, 4, 6	Suspension compliance, $C_{ms}$	0.35	0.35	[mm/N]
3, 4, 6	Equivalent air volume, $V_{as}$	66	66	[mlit.]
3, 4, 6	Mechanical resistance, $R_{ms}$	0.57	0.57	[Ns/m]
3, 4, 6	Mechanical Q, $Q_{ms}$	1.9	1.9	[-]
3, 4, 6	Electrical Q, $Q_{es}$	1.34	1.74	[-]
3, 4, 6	Total Q, $Q_{ts}$	0.79	0.90	[-]
4	Voice coil resistance, $R_{DC}$	3.5	6.5	[ohm]
5	Voice coil inductance, $L_e$ (measured at 1 kHz)	23	35	[μH]
	Voice coil inside diameter	30	30	[mm]
	Voice coil winding height	1.7	1.7	[mm]
	Air gap height	2.5	2.5	[mm]
	Theoretical linear motor stroke, $X_{max}$	±0.4	±0.4	[mm]
	Magnet weight			[g]
	Total unit net weight excl. packaging			[kg]
3, 4, 5	$K_{rm}$	2.9	2.8	[mohm]
3, 4, 5	$E_{rm}$	0.50	0.53	[-]
3, 4, 5	$K_{xm}$	58	424	[mH]
3, 4, 5	$E_{xm}$	0.20	0.036	[-]

Note 1 Measured in infinite baffle.

Note 2 Tested in free air (no cabinet, no baffle).

Note 3 Measured using a semi-constant current source, nominal level 2 mA.


Note 4 Measured at 25 deg. C

Note 5 It is generally a rough simplification to assume that loudspeaker transducer voice coils exhibit the characteristics of an inductor. Instead it is a far more accurate approach to use the more advanced model often referred to as the "Wright empirical model", also used in LEAP-4 as the TSL model ([www.linearx.com](http://www.linearx.com)), involving parameters  $K_{rm}$ ,  $E_{rm}$ ,  $K_{xm}$ , and  $E_{xm}$ . This more accurate transducer model is described in a technical paper [here at our web site](#).


Note 6 Measured before burn in. The unit is not burned in before shipping.

# SPECIFICATIONS


## TW030WA11/12 30 mm textile tweeter with waveguide, 4/8 ohm

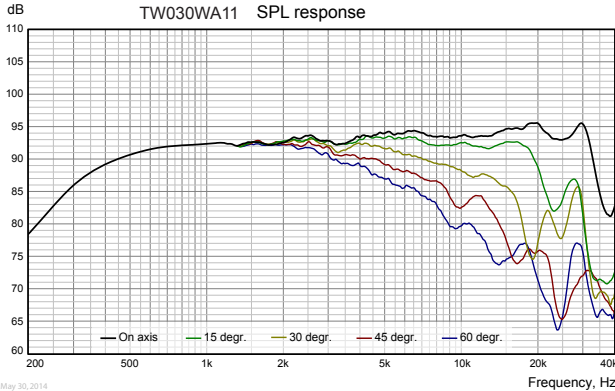


Measuring conditions, SPL  
 Driver mounting: Flush in infinite baffle, back side open (no cabinet)  
 Microphone distance: 1.0 m  
 Input signal: 2.83 VRMS stepped sine wave  
 Smoothing: 1/6 oct.

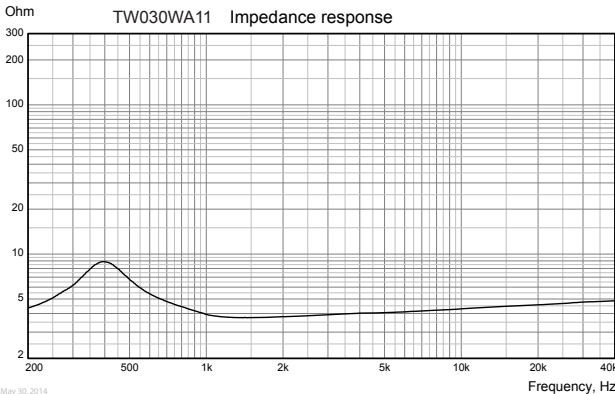

Measuring conditions, impedance  
 Driver mounting: Free air, no baffle, back side open (no cabinet)  
 Input signal: Stepped sine wave, semi-current-drive, nominal current 2 mA  
 Smoothing: None

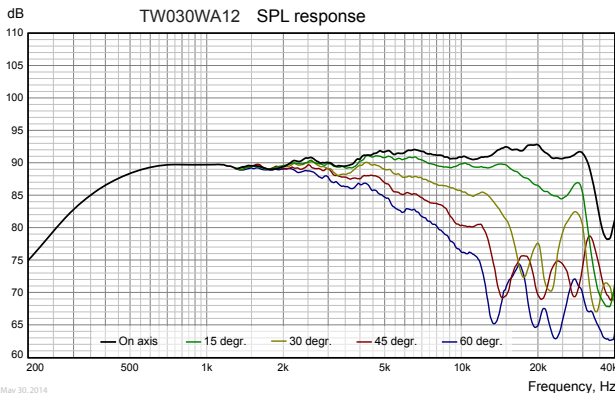

Measuring conditions, SPL  
 Driver mounting: Flush in infinite baffle, back side open (no cabinet)  
 Microphone distance: 1.0 m  
 Input signal: 2.83 VRMS stepped sine wave  
 Smoothing: 1/6 oct.

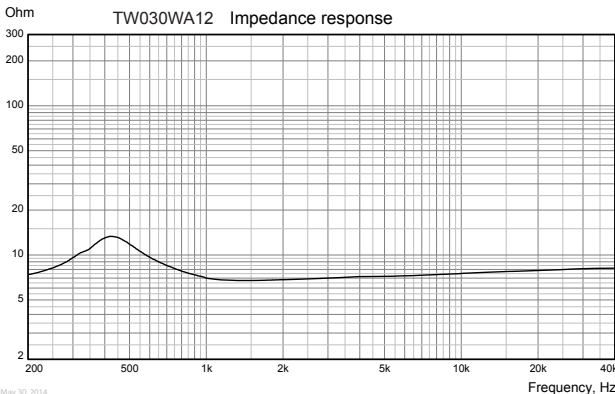


Measuring conditions, impedance  
 Driver mounting: Free air, no baffle, back side open (no cabinet)  
 Input signal: Stepped sine wave, semi-current-drive, nominal current 2 mA  
 Smoothing: None

# SPECIFICATIONS

**TW030WA11/12 30 mm textile tweeter with waveguide, 4/8 ohm**


## OUTLINE DRAWING (nominal dimensions)

Dimensions in mm

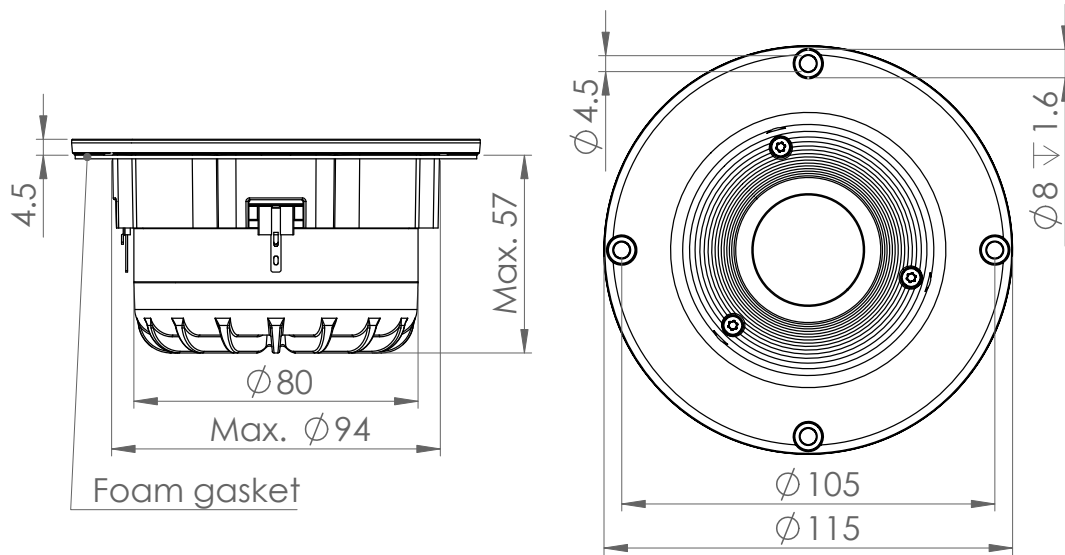

May 30, 2014

## CONNECTIONS

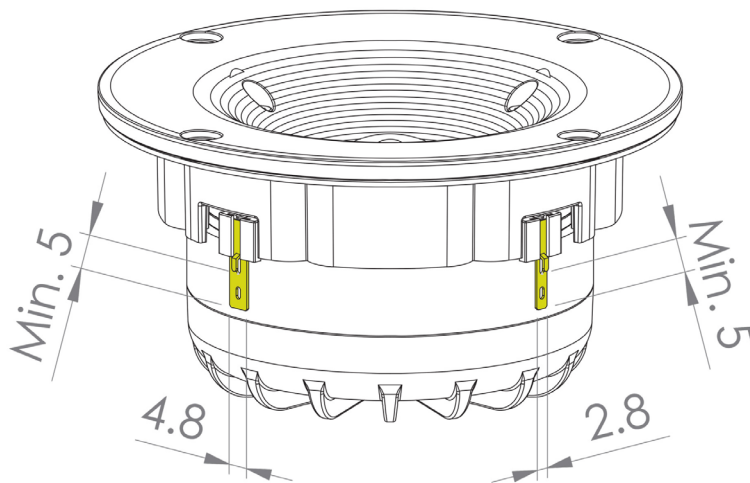

Thickness, both terminals: 0.5 mm  
Terminal plating: Gold

## PACKAGING AND ORDERING INFORMATION

Part no. TW030WA11-01	4 ohm, individual packaging (one piece per box)
Part no. TW030WA11-02	4 ohm, bulk packaging
Part no. TW030WA12-01	8 ohm, individual packaging (one piece per box)
Part no. TW030WA12-02	8 ohm, bulk packaging

Latest update: June 2, 2014