


- COMPRERHNSIVE SOLUTION FOR AUDIO DESIGN.
- COMBINE DRIVER, PASSIVE RADIATOR AND BOX AS ONE UNIT, PATENTED.
- SLIM AND TINY, LOW BASS FO = 95 Hz.
- MODULE COULD BE RESHAPED TO FIT CUSTOMER'S APPLICATION.
- GOOD FOR PORTABLE, SOUNDBAR, MULTIMEDIA... APPLICATION.



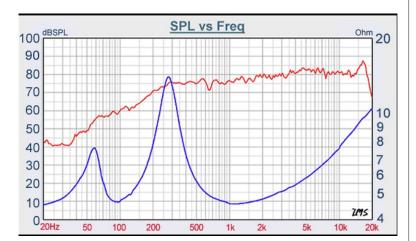

SYSTEM SPECIFICATION

SYSTEM		Passive radiator design
ACTIVE DRIVER	40r	nm inverted shape driver
DIAPHRAGM	Alum.	composite with elastomer
HOUSING		PP composite material
FINISH		Black
DIMENSIONS		Ø42 x 37mm
VOICE COIL DIAMETER		25.4 mm
IMPEDANCE		4ohm
POWER LOADING		2 W(RMS)
MUSIC POWER		4 W
RESPONSE RANGE		95Hz - 20KHz
SENSITIVITY 1W/1m		78 dB
FO		95 Hz
POWER RECOMMENDE		D 8 W (RMS)
DESIGN SUGGESTION		High pass filter with 80 Hz, -12dB/oct