


OD=18.4MM, FULL RANGE

- THE HIGHEST PERFORMANCE OF INNOVATIVE, TINY FULL RANGE DRIVER DESIGN
- OUTSIDE DIAMETER OF 18.4mm Fo:280Hz
- PP CONE WITH SANTOPRENE SURROUND
- NEODYMIUM MOTOR SYSTEM
- PATENTED PRODUCT WITH EXCELLENT CONSISTENCY
- IT'S GOOD FOR MULTIMEDIA APPLICATION

DIAPHRAGM MTL	Mineral filled pp
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3,6 Ω
SENSITIVITY 1W/1m	73 dB
FREQUENCY RESPONSE	280-20K Hz
FREE AIR RESONANCE	280 Hz
VOICE COIL DIAMETER	11.80 mm
AIR GAP HEIGHT	1,5 mm
RATED POWER INPUT	1 W
MAXIMUM POWER INPUT	2 W
FORCE FACTOR, BL	0.99 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	0.15 g
FERRO FLUID ENHANCED	Yes
SUSPENSION COMPL.	2663 μMN^{-1}
EFFEC.PISTON AREA	0.00014 M^2
Levc	0.007 mH
Zo	8 ohm
X-max	0 mm
Vas	0.007 Liter.
Qts	0.50
Qms	1.17
Qes	0,86

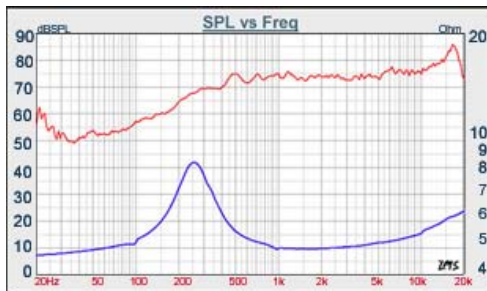

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

CLOSE