


# REVELATOR

## WOOFER

## 22W/4851T00

The Revelator woofers and subwoofers features very rigid cones in paper or aluminium that operates as a piston over a wide frequency range, in combination with Scan-Speaks low-loss linear suspension and the patented Symmetrical Drive (SD-1) it results in very low distortion and a smooth and well behaved frequency response as well as perfect transient reproduction.

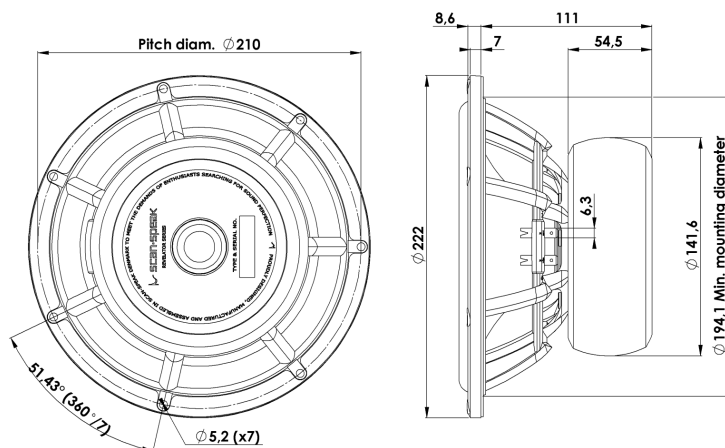

### KEY FEATURES:

- Patented Symmetrical Drive Motor Design
- Low-Loss linear suspension
- Die cast Alu Chassis vented below spider
- Rigid Paper Cone
- Low Damping SBR Rubber Surround
- Ferrite Magnet System w. Rubber Boot

#### T-S Parameters

Resonance frequency [fs]	21 Hz
Mechanical Q factor [Qms]	5.20
Electrical Q factor [Qes]	0.23
Total Q factor [Qts]	0.22
Force factor [Bl]	8.2 Tm
Mechanical resistance [Rms]	0.81 kg/s
Moving mass [Mms]	32.5 g
Suspension compliance [Cms]	1.85 mm/N
Effective diaph. diameter [D]	167 mm
Effective piston area [Sd]	220 cm <sup>2</sup>
Equivalent volume [Vas]	126 l
Sensitivity (2.83V/1m)	89 dB
Ratio Bl/ $\sqrt{Re}$	4.26 N/ $\sqrt{W}$
Ratio fs/Qts	93 Hz

#### Notes:

IEC specs. refer to IEC 60268-5 third edition.  
All Scan-Speak products are RoHS compliant.  
Data are subject to change without notice.  
Datasheet updated: February 22, 2011.

#### Electrical Data

Nominal impedance [Zn]	4 $\Omega$
Minimum impedance [Zmin]	4.5 $\Omega$
Maximum impedance [Zo]	87.4 $\Omega$
DC resistance [Re]	3.7 $\Omega$
Voice coil inductance [Le]	0.3 mH


#### Power Handling

100h RMS noise test (IEC 17.1)	170 W
Long-term max power (IEC 17.3)	- W

#### Voice Coil and Magnet Data

Voice coil diameter	50 mm
Voice coil height	24 mm
Voice coil layers	2
Height of gap	6 mm
Linear excursion	$\pm 9$ mm
Max mech. excursion	$\pm 14$ mm
Unit weight	3.6 kg







# REVELATOR

## WOOFER

## 22W/4851T00

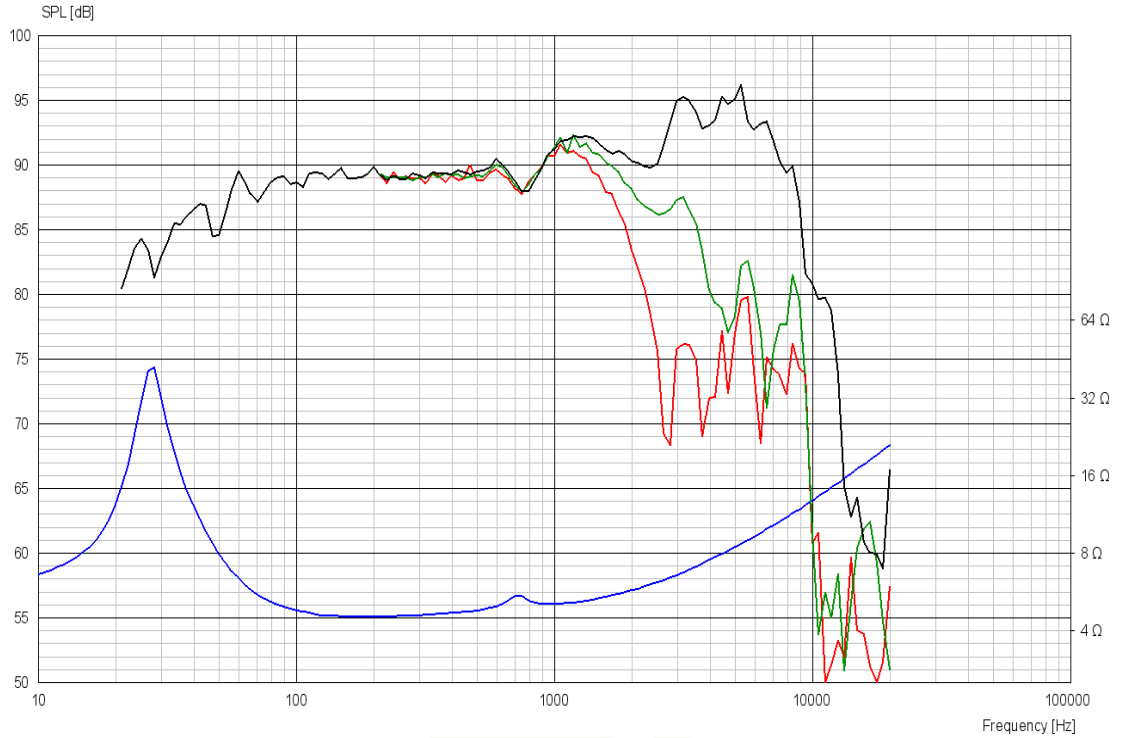

### Advanced Parameters (Preliminary)

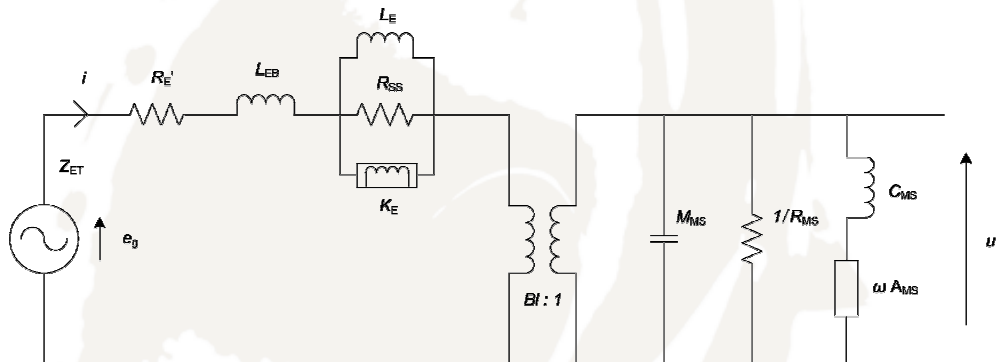

#### Electrical data:

Resistance [Re']	4.04 Ω
Free inductance [Leb]	0.101 mH
Bound inductance [Le]	0.473 mH
Semi-inductance [Ke]	0.0227 SH
Shunt resistance [Rss]	2290 Ω

#### Mechanical Data

Force Factor [Bl]	7.76 Tm
Moving mass [Mms]	39.0 g
Compliance [Cms]	1.21 mm/N
Mechanical resistance [Rms]	0.100 kg/s
Admittance [Ams]	0.183 mm/N