
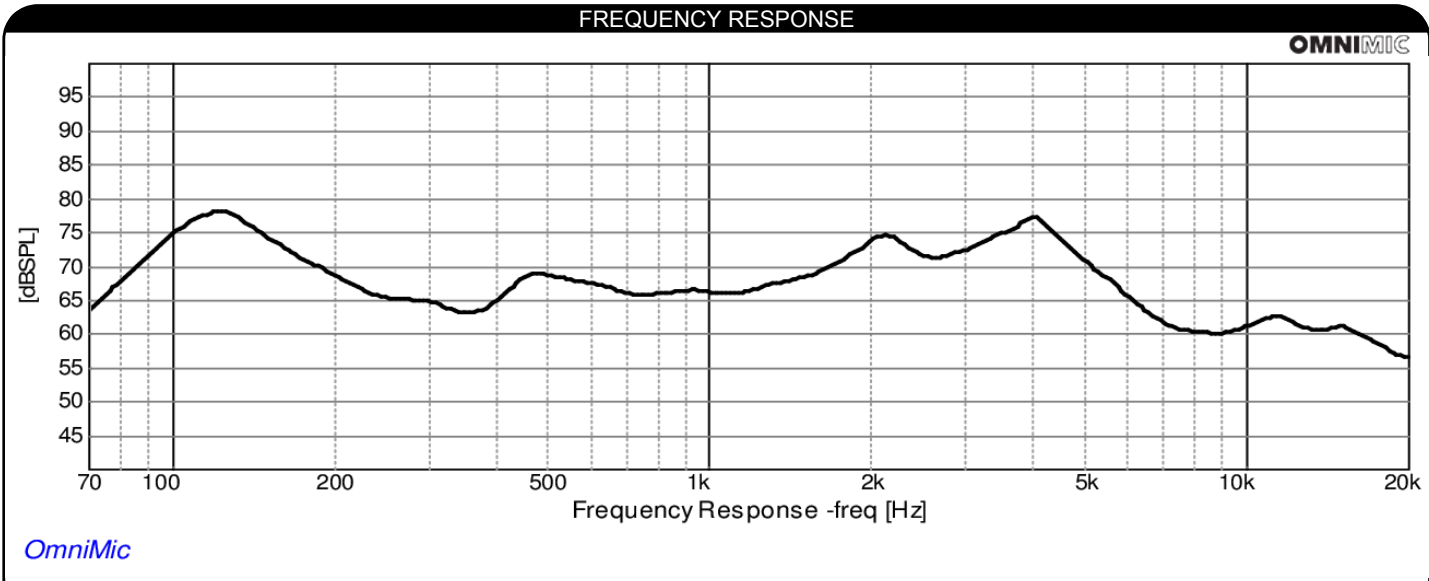


PARAMETERS	
Impedance	8 ohms
Re	7.46 ohms
Le	0.86 mH @ 1 kHz
Fs	695 Hz
Qms	N/A
Qes	N/A
Qts	1.52
Mms	38.2 g
Cms	N/A
Sd	N/A
Vd	N/A
BL	18.2 Tm
Vas	N/A
Xmax	N/A
VC Diameter	50 mm
SPL	N/A
RMS Power Handling	50 watts
Usable Frequency Range (Hz)	40 - 15,000 Hz

- ### FEATURES
- Rugged plastic housing with black matte finish
  - 25mm long M5 threaded mounting post for single-point mounting onto almost any surface (mounting hardware is included)
  - Hermetically-sealed design for installation in wet or humid environments

- ### APPLICATIONS
- Invisible home theater and multi-room audio
  - Electronic gaming machines
  - Advertising signage
  - Point-of-purchase displays
  - Multimedia exhibits
  - Commercial distributed audio
  - Kiosks
  - Automotive audio
  - Bathroom tubs and showers

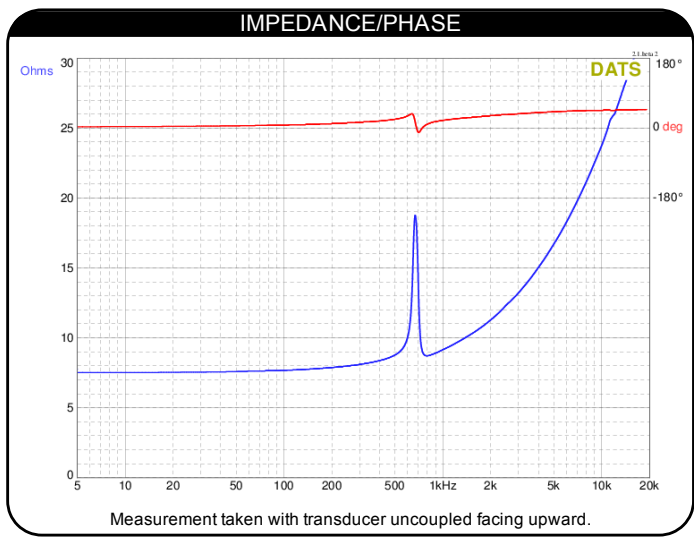

1/3<sup>rd</sup> octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.