

Parameters


Impedance (Ω)	16
Re (Ω)	15.8
Le (mH) @ 1 kHz	0.61
Fs (Hz)	697
Qms	9.17
Qes	11.5
Qts	5.11
Mms (g)	0.01
Cms (mm/N)	4.61
Sd (cm ²)	1.77
Vd (cm ³)	0.02
BL (Tm)	0.26
VAs (liters)	0.02
XMAX (mm)	0.1
VC Diameter (mm)	10
SPL (dB 1W/1m)	76
RMS Power Handling (w)	0.25
Usable Frequency Range (Hz)	690-20,000

Features

- Lightweight Mylar diaphragm
- Extended frequency range
- Neodymium magnet structure
- Injection-molded nonmetallic frame
- Suitable for low power applications
- 16 Ohm impedance

Note: All dimensions in mm.

Frequency Response

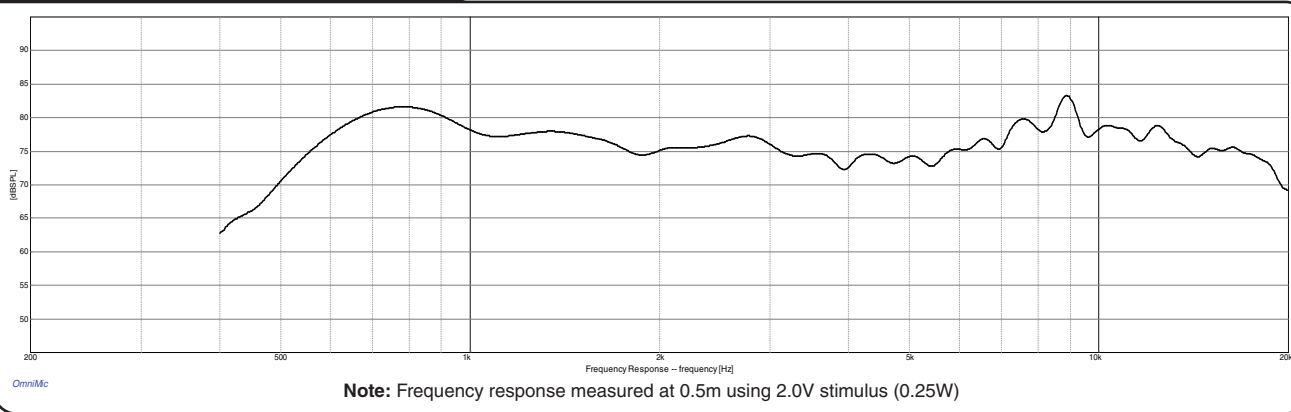

Impedance/Phase

