


- FULL RANGE, WIDE DISPERSION DESIGN
- ABS BASKET
- INVERTED ALUM./MG WITH TPR SURROUND
- NEODYMIUM MAGNET DESIGN
- GOOD FOR MULTI-MEDIA, HOME THEATER, CAR APPLICATION
- MAGNETICALLY SHIELDED

2" ALUM./MG FULL RANGE

DIAPHRAGM MTL	Alum/Mg
SURROUND MTL	TPR
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.5 Ω
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	160-20K Hz
FREE AIR RESONANCE	160 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	3 mm
RATED POWER INPUT	10 W
MAXIMUM POWER INPUT	20 W
FORCE FACTOR, BL	3.70 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	1 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	959 MN <sup>-1</sup>
EFFEC.PISTON AREA	0.0013 M <sup>2</sup>
Levc	0.04 mH
Zo	39.85 ohm
X-max	1 mm
Vas	0.19 Liter.
Qts	0.23
Qms	2.67
Qes	0.26

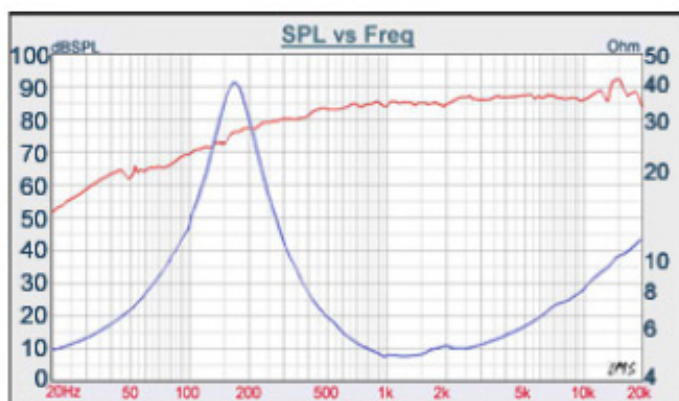

VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com