




BT2-8 3-3/8" HORN LOADED BULLET TWEETER


MECHANICAL DRAWING

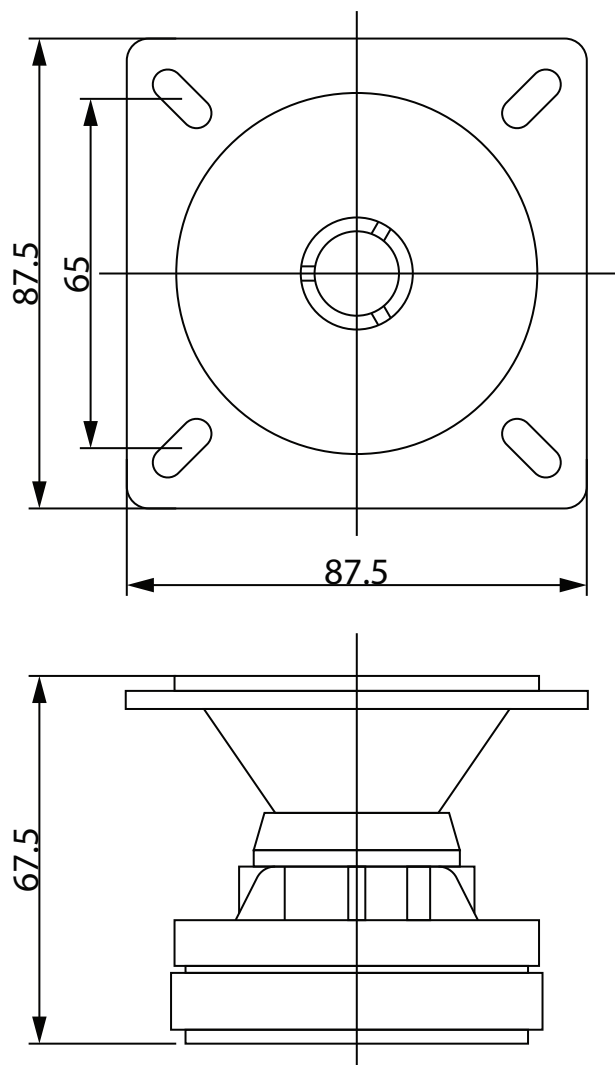

FEATURES

- Controlled 60° x 60° dispersion pattern for even response
- Common 2.75" mounting hole, ideal as a replacement tweeter
- High power handling allows excellent output capability
- Great replacement speaker


IMPEDANCE/PHASE

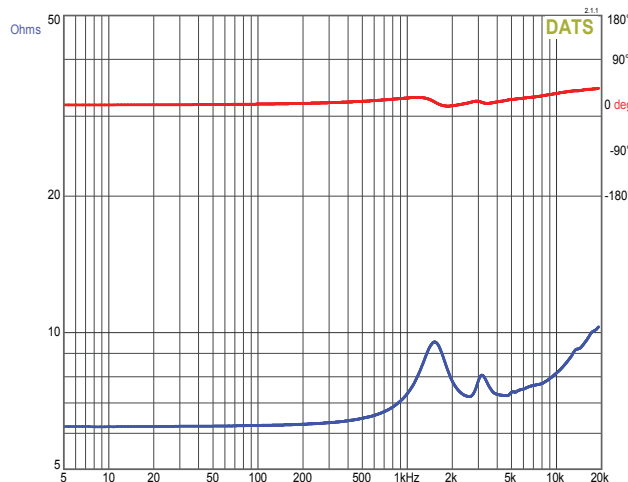

PARAMETERS

Impedance	8 ohms
Re	6.2 ohms
Le	0.6 mH
Fs	1,498 Hz
Qms	-
Qes	-
Qts	-
Mms	-
Cms	-
Sd	-
Vd	-
BL	-
Vas	-
Xmax	-
VC Diameter	25 mm
SPL	100 dB @ 2.83V/1m
RMS Power Handling (AES 426B)	80 watts
Usable Frequency Range (Hz)	-

FREQUENCY RESPONSE

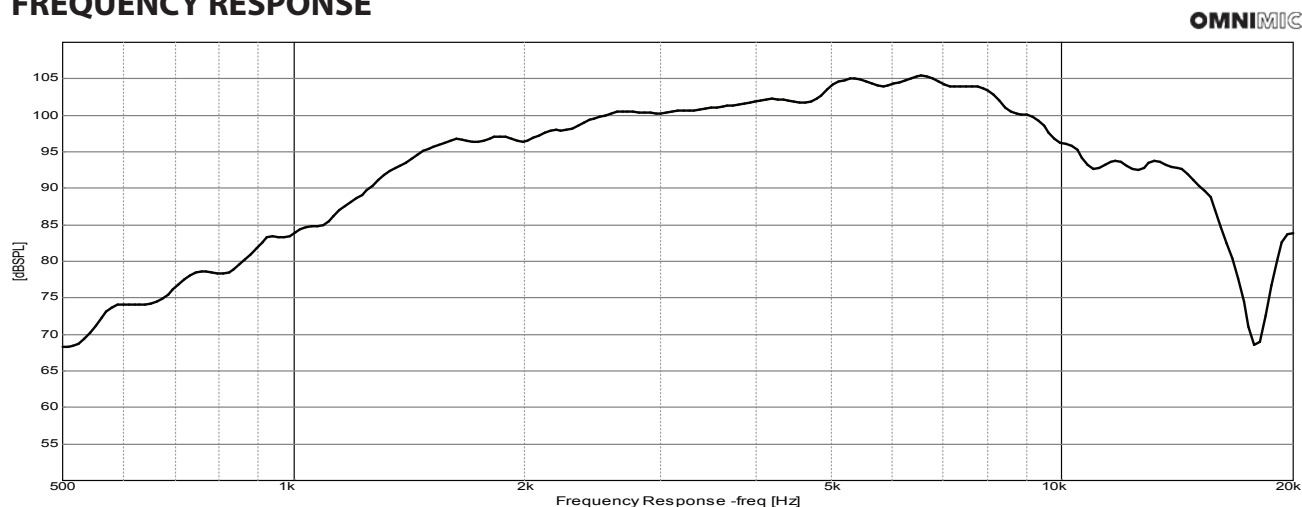

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.