




4SMP-8 4" WOOFER SURFACE MOUNT POLY CONE 8 OHM


MECHANICAL DRAWING

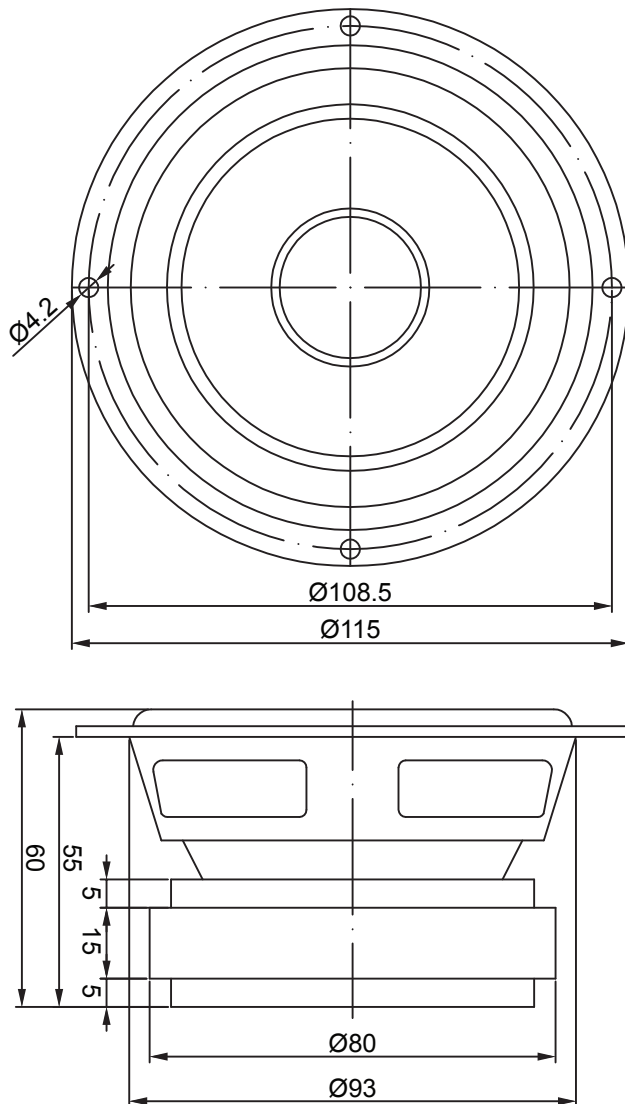

FEATURES

- Damped poly cone with rubber surround for controlled resonance
- Copper cap reduces inductance and distortion
- Low profile frame suitable for surface mount installations
- Vented pole piece improves cooling to limit power compression
- Aluminum voice coil former for rapid heat transfer and thermal stability
- Integrated foam gasket for an airtight cabinet seal

IMPEDANCE/PHASE

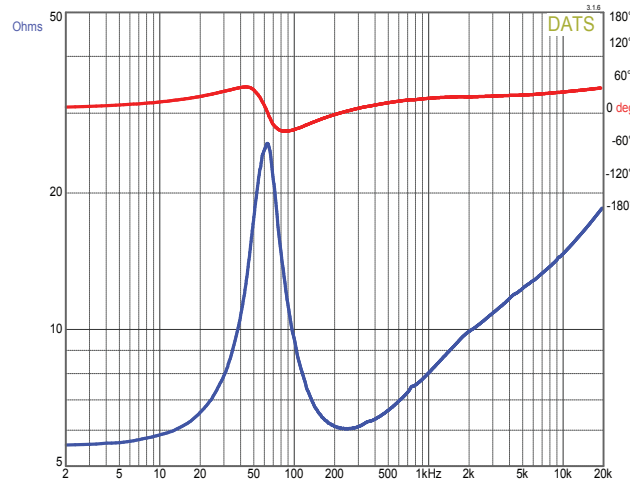

PARAMETERS

Impedance:	8 ohms
Re:	5.5 ohms
Le:	0.58 mH
Fs:	63 Hz
Qms:	3.0
Qes:	0.83
Qts:	0.65
Mms:	6.6g
Cms:	0.97 mm/N
Sd:	54 cm ²
Vd:	21 cm ³
BL:	4.2 Tm
Vas:	4 liters
Xmax:	4 mm
VC Diameter:	26 mm
SPL:	84.4 dB@2.83V/1m
RMS Power handling:	30 watts
Usable Frequency Range (Hz):	50 – 6,000 Hz

FREQUENCY RESPONSE

