



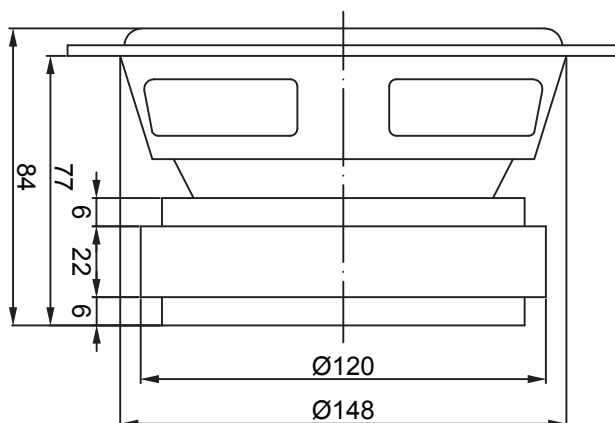

6SMP-8 6-1/2" WOOFER SURFACE MOUNT POLY CONE 8 OHM


MECHANICAL DRAWING

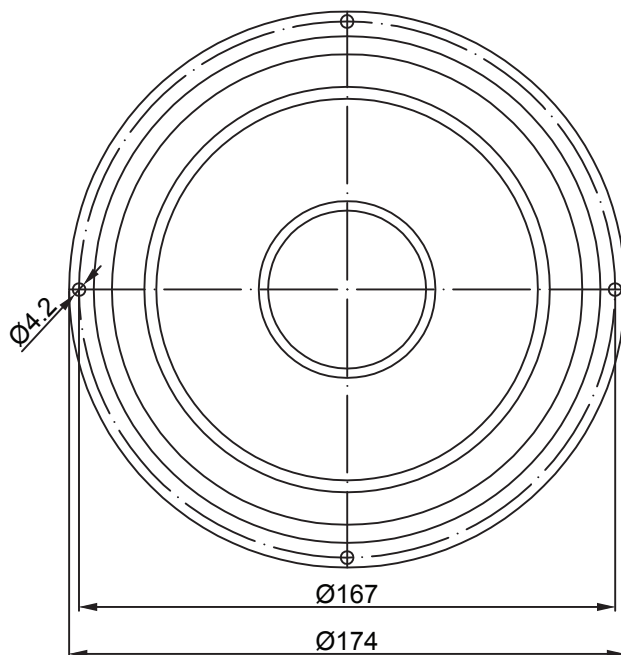

FEATURES

- Damped poly cone with rubber surround for controlled resonance
- Copper cap reduces inductance and distortion
- Low profile frame suitable for surface mount installations
- Vented pole piece improves cooling to limit power compression
- Aluminum voice coil former for rapid heat transfer and thermal stability
- Integrated foam gasket for an airtight cabinet seal

IMPEDANCE/PHASE

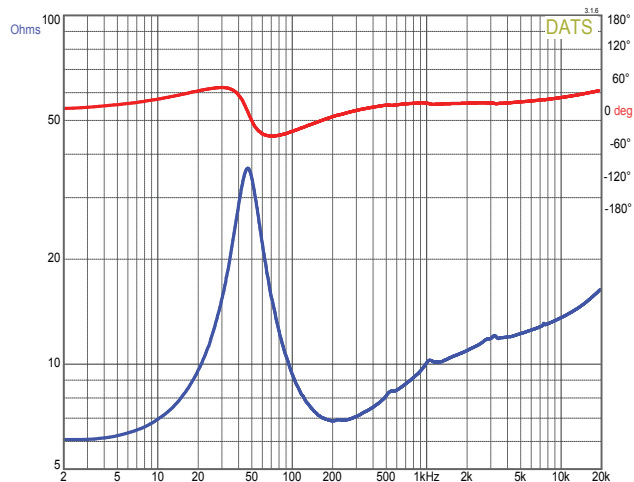

PARAMETERS

Impedance:	8 ohms
Re:	6.1 ohms
Le:	0.43 mH
Fs:	47 Hz
Qms:	2.70
Qes:	0.54
Qts:	0.45
Mms:	21g
Cms:	0.55 mm/N
Sd:	136 cm ²
Vd:	68.4 cm ³
BL:	8.37 Tm
Vas:	14.5 liters
Xmax:	5 mm
VC Diameter:	39 mm
SPL:	87.7 dB@2.83V/1m
RMS Power handling:	50 watts
Usable Frequency Range (Hz):	40 – 2,500 Hz

FREQUENCY RESPONSE

