
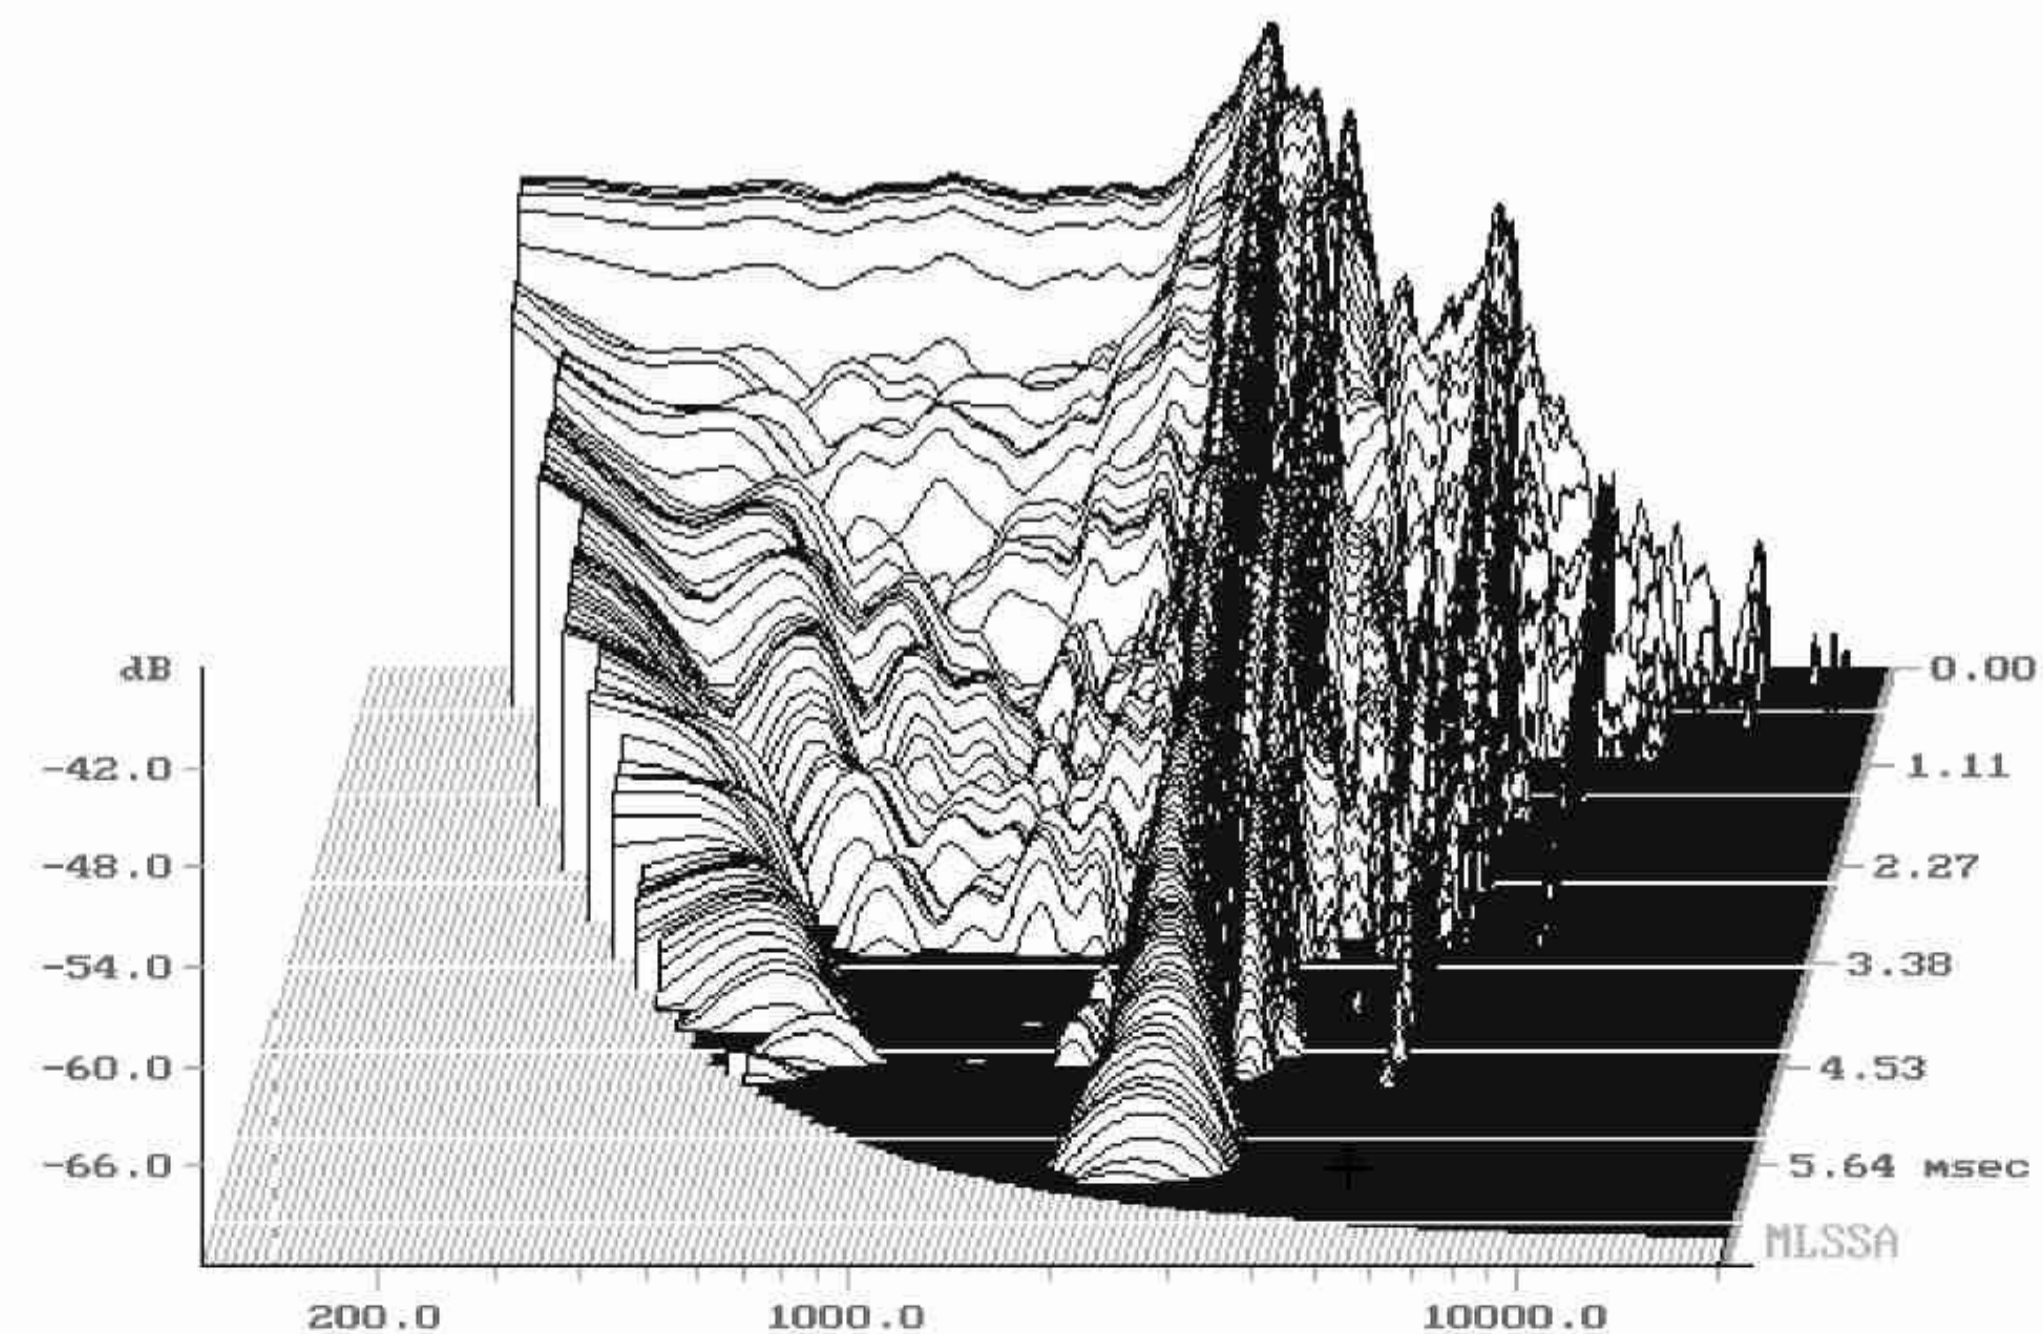


Ultra stiff die cast chassis
Ribber paper cone
High power handling capacity

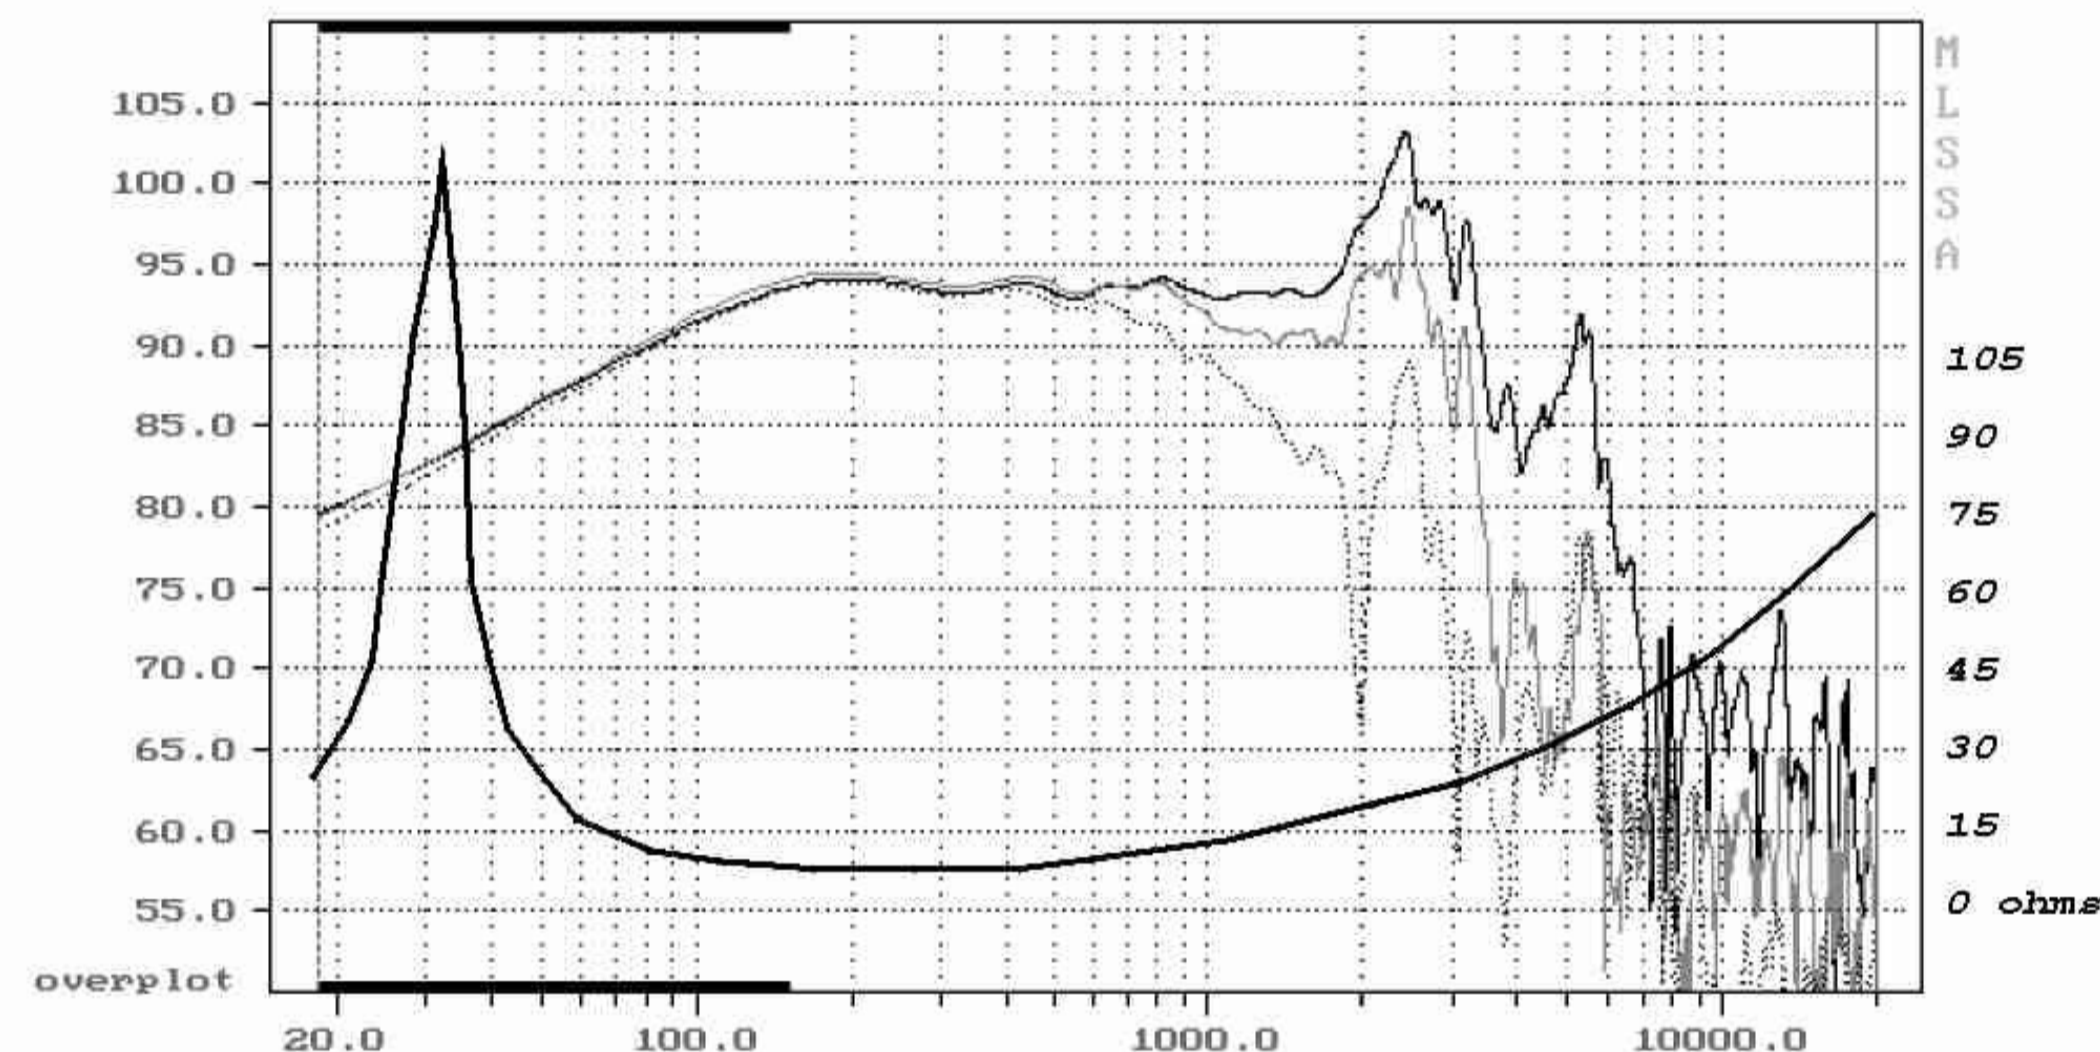

Nominal impedance... 8 ohms
Resonance... 28 Hz
Power handling (IEC)... 150 W
Sensitivity (2.83V/1m)... 98.0 dB

Resistance (DC)... 5.8 ohms
Inductance... 0.38 mH
Xmax... ± 4.0 mm
Qms... 6.69
Qes... 0.28
Qts... 0.27
Vas... 264 l

Voice coil diam... 70 mm
Voice coil length... 15 mm
Former... kapton
Layer(s)... 1
Wire type... flat
Force factor... 13.5 NA⁻¹
Moving mass... 52.0 gr

Cone material... paper
Suspension... foam
Chassis... zamack
Total mass... 8.0 kg