




5SMP-8 5-1/4" WOOFER SURFACE MOUNT POLY CONE 8 OHM


MECHANICAL DRAWING

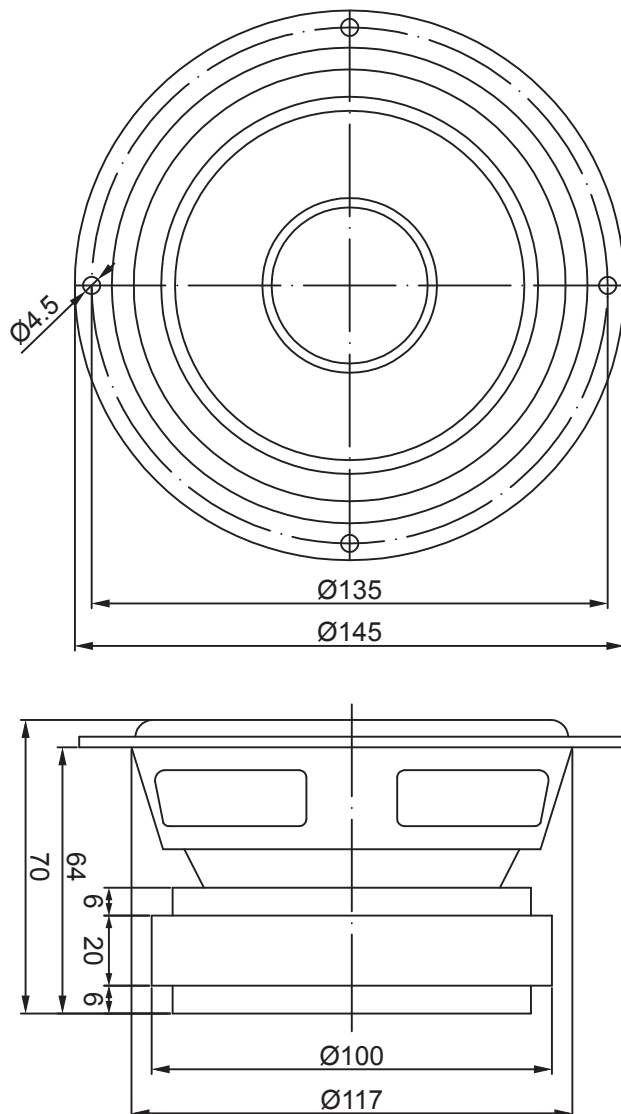

FEATURES

- Damped poly cone with rubber surround for controlled resonance
- Copper cap reduces inductance and distortion
- Low profile frame suitable for surface mount installations
- Vented pole piece improves cooling to limit power compression
- Aluminum voice coil former for rapid heat transfer and thermal stability
- Integrated foam gasket for an airtight cabinet seal

IMPEDANCE/PHASE

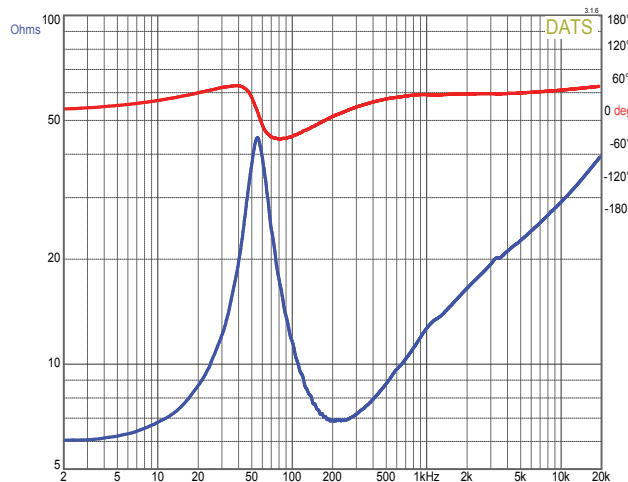

PARAMETERS

Impedance:	8 ohms
Re:	6 ohms
Le:	1 mH
Fs:	55 Hz
Qms:	3.26
Qes:	0.51
Qts:	0.44
Mms:	12g
Cms:	0.70 mm/N
Sd:	80 cm ²
Vd:	16 cm ³
BL:	7.0 Tm
Vas:	6.4 liters
Xmax:	2 mm
VC Diameter:	26 mm
SPL:	86.4 dB@2.83V/1m
RMS Power handling:	35 watts
Usable Frequency Range (Hz):	50 – 2,500 Hz

FREQUENCY RESPONSE

