

Note: All dimensions in mm.


Features

- Lightweight Mylar diaphragm
- Extended frequency range
- Neodymium magnet structure
- Injection-molded nonmetallic frame
- Suitable for low power applications
- 8 ohm impedance compatible with most amplifiers

Parameters

Impedance (Ω)	8
Re (Ω)	7.72
Le (mH) @ 1 kHz	0.172
Fs (Hz)	191.8
Qms	1.59
Qes	4.45
Qts	1.17
Mms (g)	0.07
Cms (mm/N)	9.68
Sd (cm ²)	4.91
Vd (cm ³)	0.05
BL (Tm)	0.39
VAs (liters)	0.33
XMAX (mm)	0.1
VC Diameter (mm)	12.5
SPL (dB 1W/1m)	75
RMS Power Handling (w)	0.25
Usable Frequency Range (Hz)	190-20,000

Frequency Response

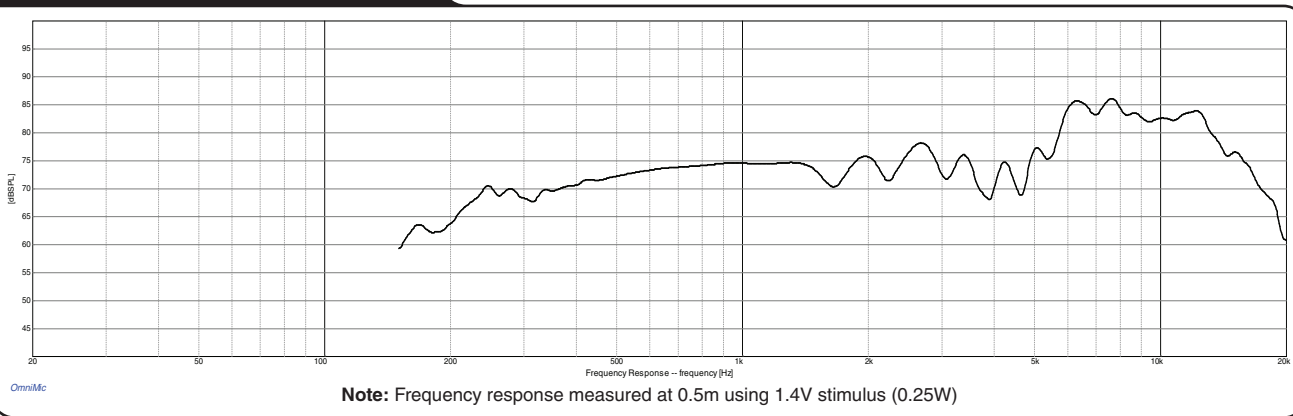

Impedance/Phase

