




# B15EX

Courbe de réponse réelle mesurée à 1 m.

Type 3351

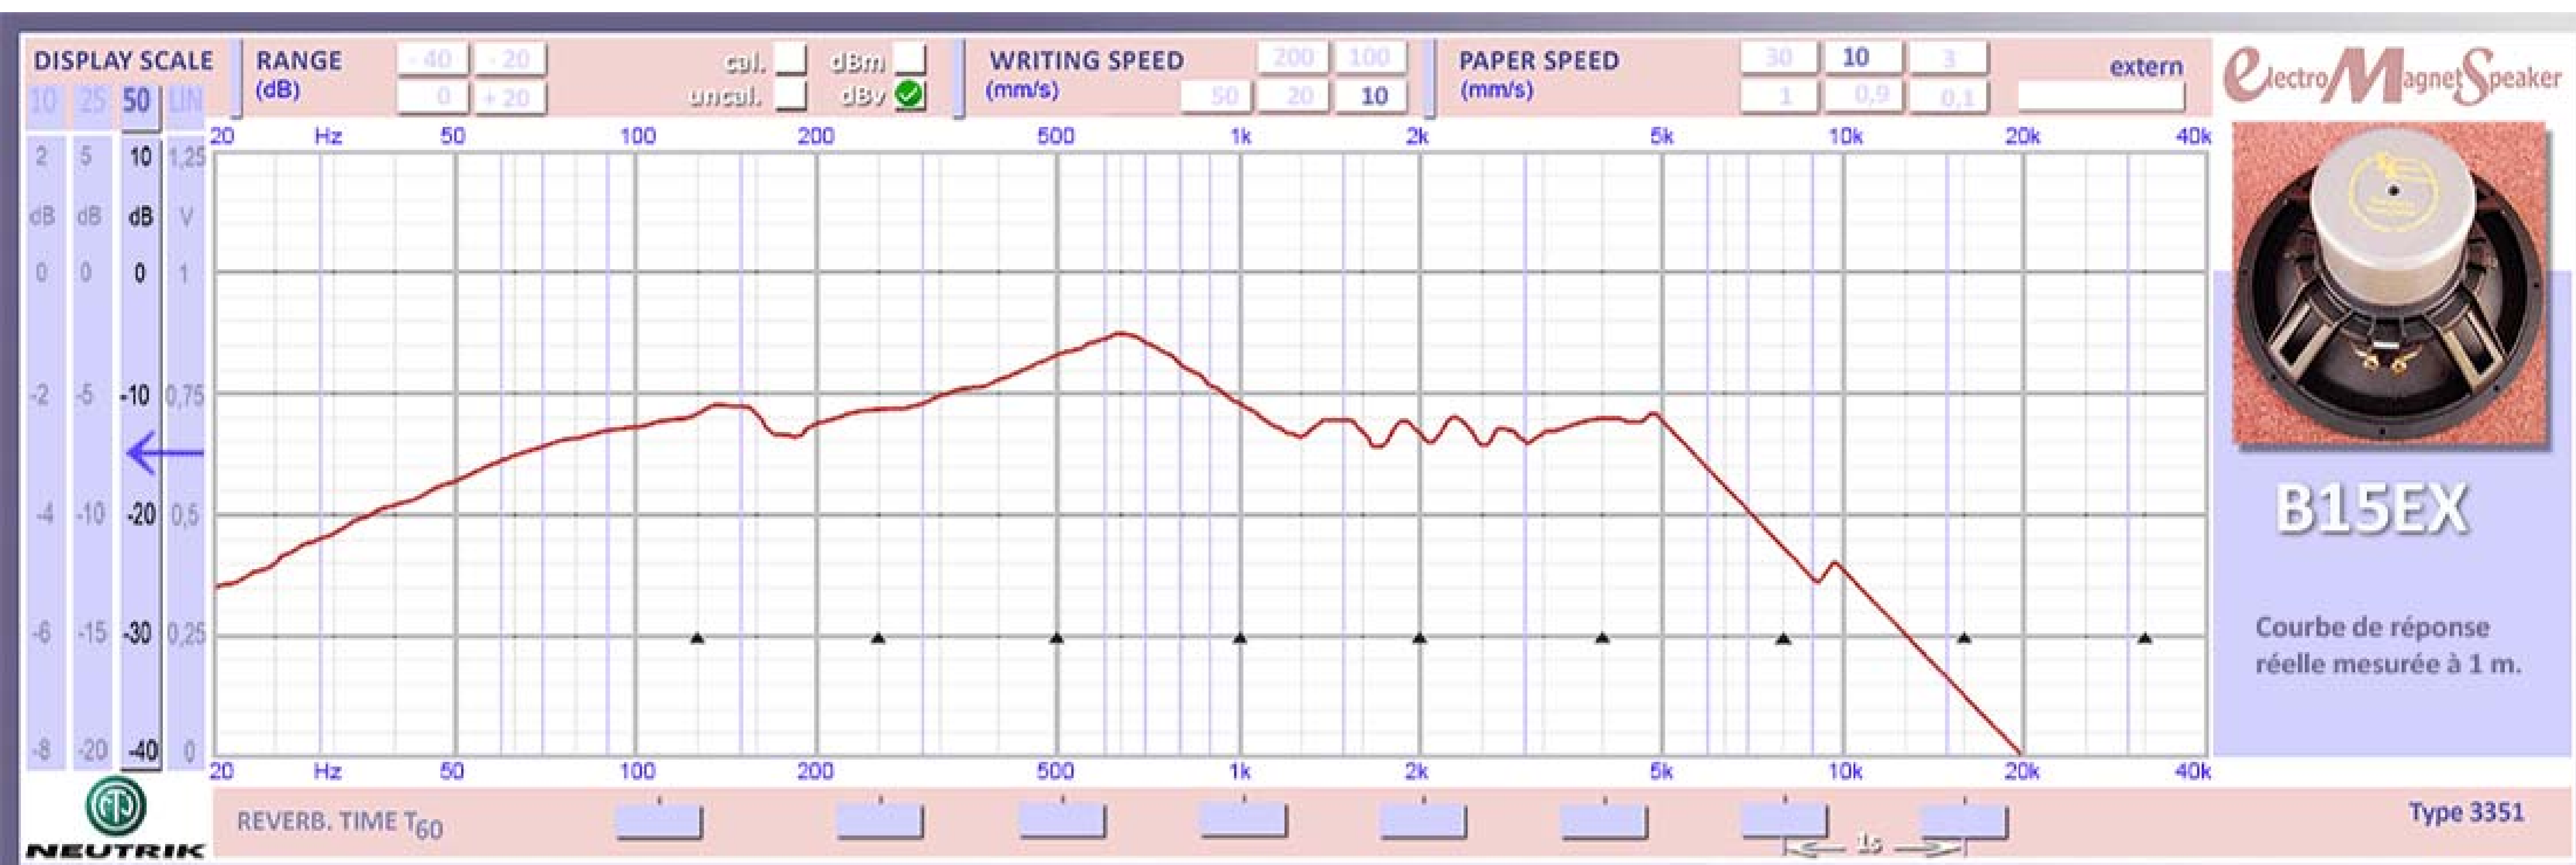

THIELE AND SMALL PARAMETERS				B15EX (8 Ohms) loudspeaker parameters						* 16 Ohms also available		** Variable with eletromagnetic tension	
FR	22 Hz	RCC	6.5 Ohms	POWER	5 V	7.5 V	10 V	12.5 V	15 V				
W	100 Watts	Qms	7.068 *	Qts	0.374	0.229	0.178	0.158	0.146				
Z	8 Ohms *	Qes	0.149 **	Qes	0.395	0.236	0.183	0.162	0.149				
BP	23 - 5000 Hz	Qts	0.146 **	Qms	6.915	7.163	7.137	6.675	7.068				
Mms	58 gr	Rms	1.230 **	Bl	12.150	15.619	17.593	18.794	19.544				
BL	19.5 **	S	8.55 dm <sup>2</sup>	R (%)	2.5	4.2	5.6	6.2	6.8				
Xmax	7 mm	Vas	791 L	Sensitivity	95.8	98.1	99.4	99.8	100.2				
FA	335 **	R	6.8 % **	DIMENSIONS	Net Weight (kg)	Depth (mm)	Overall Ø (mm)	Baffle Cut-out Ø (mm)	Number of mounting holes	Voice coil Ø (mm)			
Eff	100.2 dB **	Le	0.9 mH		13.750	235	402	360	8 at 45° Ø 382 mm	66			

