



# WF SERIES

# W6-2090

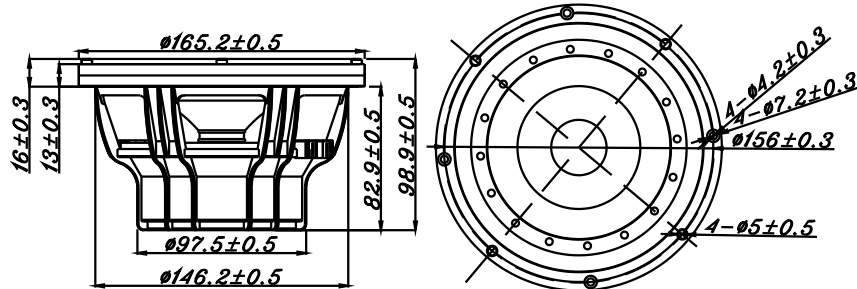

- ENGINEERING PLASTIC BASKET
- HIGH HEAT PERFORMANCE OF CONE ASSEMBLY REACHED 150°C (302°F)
- GOOD FOR ANY HIGH HEAT AND DUSTY ENVIRONMENT
- VC=25.4mm, SPL=88dB
- ONE PIECE DESIGN OF BASKET / MAGNETIC SYSTEM
- ALUMINUM DUST CAP

## 6.5" HIGH HEAT RESISTANT DRIVER

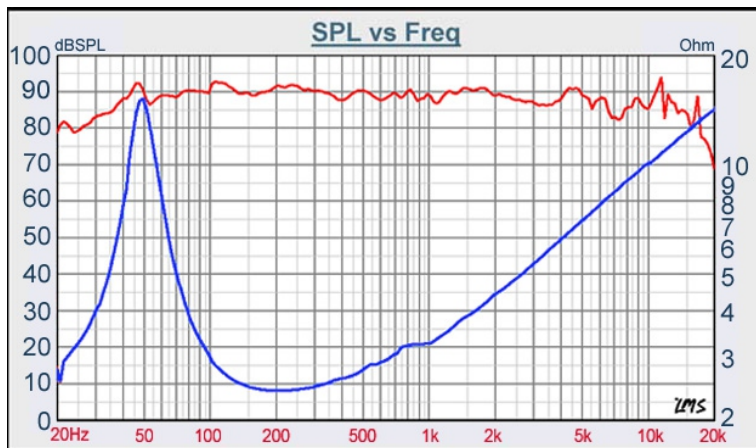

DIAPHRAGM MTL	Glass Fiber
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	2 $\Omega$
DCR IMPEDANCE	1.8 $\Omega$
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	50-5 K Hz
FREE AIR RESONANCE	50 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	4 mm
RATED POWER INPUT	30 W
MAXIMUM POWER INPUT	60 W
FORCE FACTOR, BL	4.14 TM
TYPE OF MAGNET	Ferrite
MOVING MASS	16.96 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	613.99 $\mu\text{MN}^{-1}$
EFFECTIVE PISTON AREA	0.0014 $\text{M}^2$
Levc	0.45 mH
Zo	17 $\Omega$
X-max	4.8 mm
Vas	13.11 Litr
Qts	0.49
Qms	4.10
Qes	0.55

# TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com