




# TWEETER

# D3004/604005

The GOLD SERIES are specially selected units from Scan-Speak's well-known home audio speakers. Which have been upgraded and optimized for automotive use. This series enables audiophiles to experience in their vehicle the - TRUE TO LIVE - that they enjoy from their high-end home audio system.

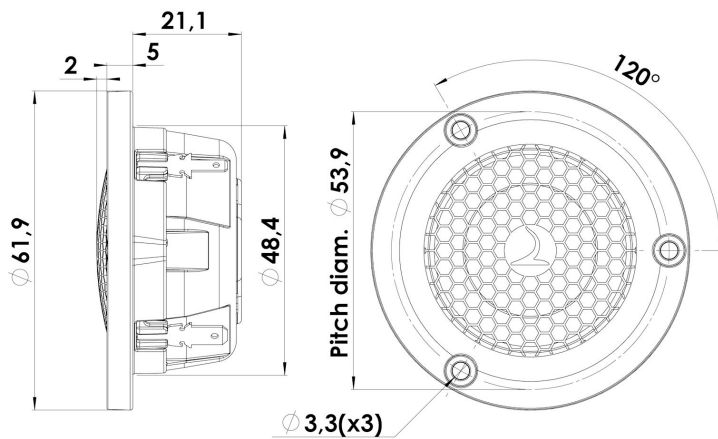

## KEY FEATURES:

- 1" Beryllium Diaphragm (99% pure Be)
- High Power Patented SD-2 magnet system
- Die Cast Housing & Face Plate
- Large Roll Surround f. wide dispersion
- Compact Non Resonant Alu Rear Champer
- Sound Transparent Protective Grill

### T-S Parameters

|                               |                   |
|-------------------------------|-------------------|
| Resonance frequency [fs]      | 715 Hz            |
| Mechanical Q factor [Qms]     | 2.25              |
| Electrical Q factor [Qes]     | 1.00              |
| Total Q factor [Qts]          | 0.69              |
| Force factor [Bl]             | 2.4 Tm            |
| Mechanical resistance [Rms]   | 0.89 kg/s         |
| Moving mass [Mms]             | 0.35 g            |
| Compliance [Cms]              | 0.11 mm/N         |
| Effective diaph. diameter [D] | 30 mm             |
| Effective piston area [Sd]    | 7 cm <sup>2</sup> |
| Equivalent volume [Vas]       | 0.01 l            |
| Sensitivity (2.83V/1m)        | 92.0 dB           |
| Ratio Bl/√Re                  | 1.43 N/√W         |
| Ratio fs/Qts                  | 1036 Hz           |

### Notes:

IEC specs. refer to IEC 60268-5 third edition.  
All Scan-Speak products are RoHS compliant.  
Data are subject to change without notice.  
Datasheet updated: March 8, 2017.

### Electrical Data

|                            |         |
|----------------------------|---------|
| Nominal impedance [Zn]     | 4 Ω     |
| Minimum impedance [Zmin]   | 3.6 Ω   |
| Maximum impedance [Zo]     | 10.9 Ω  |
| DC resistance [Re]         | 2.9 Ω   |
| Voice coil inductance [Le] | 0.03 mH |

### Power Handling

|                                 |       |
|---------------------------------|-------|
| 100h RMS noise test (IEC 17.1)* | 50 W  |
| Long-term max power (IEC 17.3)* | 100 W |

\*Filter: 2. order HP Butterworth, 2,5kHz


### Voice Coil & Magnet Data

|                     |           |
|---------------------|-----------|
| Voice coil diameter | 26 mm     |
| Voice coil height   | 2.0 mm    |
| Voice coil layers   | 2         |
| Height of gap       | 2.5 mm    |
| Linear excursion    | ± 0.25 mm |
| Max mech. excursion | ± 1.6 mm  |
| Unit weight         | 0.15 kg   |



# TWEETER

# D3004/604005

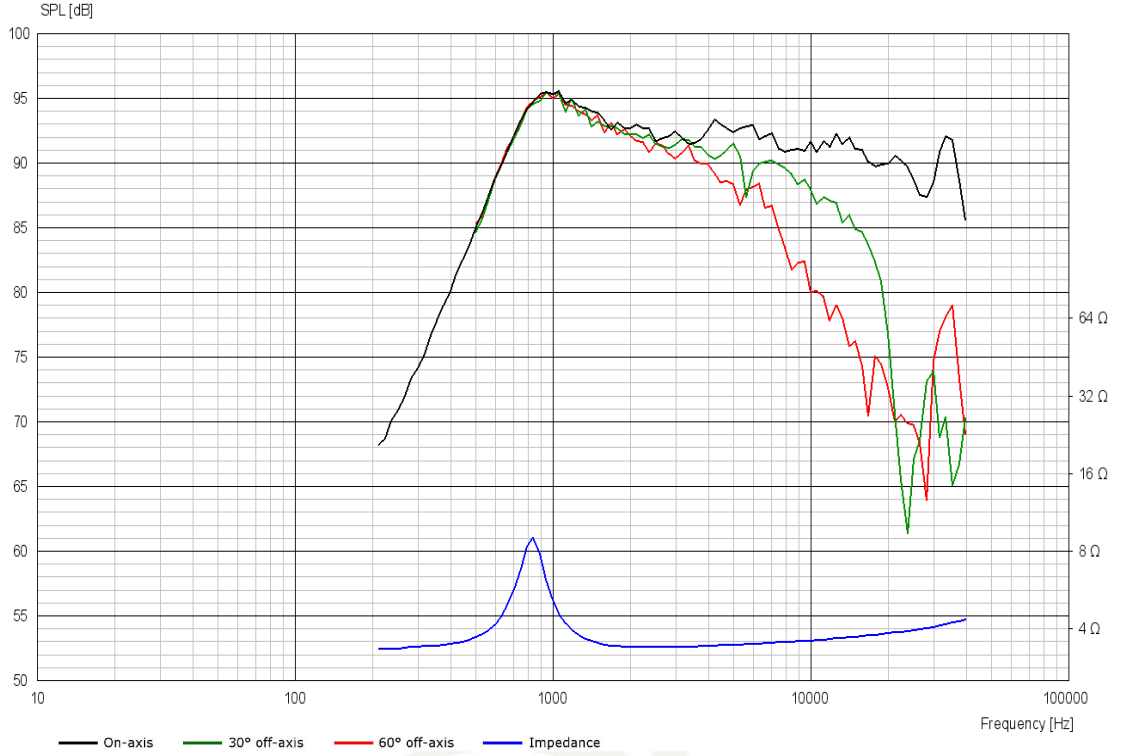

## Advanced Parameters (Preliminary)



### Electrical data

|                               |            |
|-------------------------------|------------|
| Resistance [ $R_{E'}$ ]       | - $\Omega$ |
| Free inductance [ $L_{EB}$ ]  | - mH       |
| Bound inductance [ $L_E$ ]    | - mH       |
| Semi-inductance [ $K_E$ ]     | - SH       |
| Shunt resistance [ $R_{SS}$ ] | - $\Omega$ |

### Mechanical Data

|                                    |        |
|------------------------------------|--------|
| Force Factor [ $Bl$ ]              | - Tm   |
| Moving mass [ $M_{MS}$ ]           | - g    |
| Compliance [ $C_{MS}$ ]            | - mm/N |
| Mechanical resistance [ $R_{MS}$ ] | - kg/s |
| Admittance [ $A_{MS}$ ]            | - mm/N |