


**Features**

- Robust, heavy-duty design
- High power handling
- Efficient 32mm voice coil and motor structure
- Wide frequency response

**Applications**

- Drives rigid surfaces
- Designed for commercial and industrial audio
- Perfect for glass, furniture, and other high impedance substrates

**Impedance Plot**

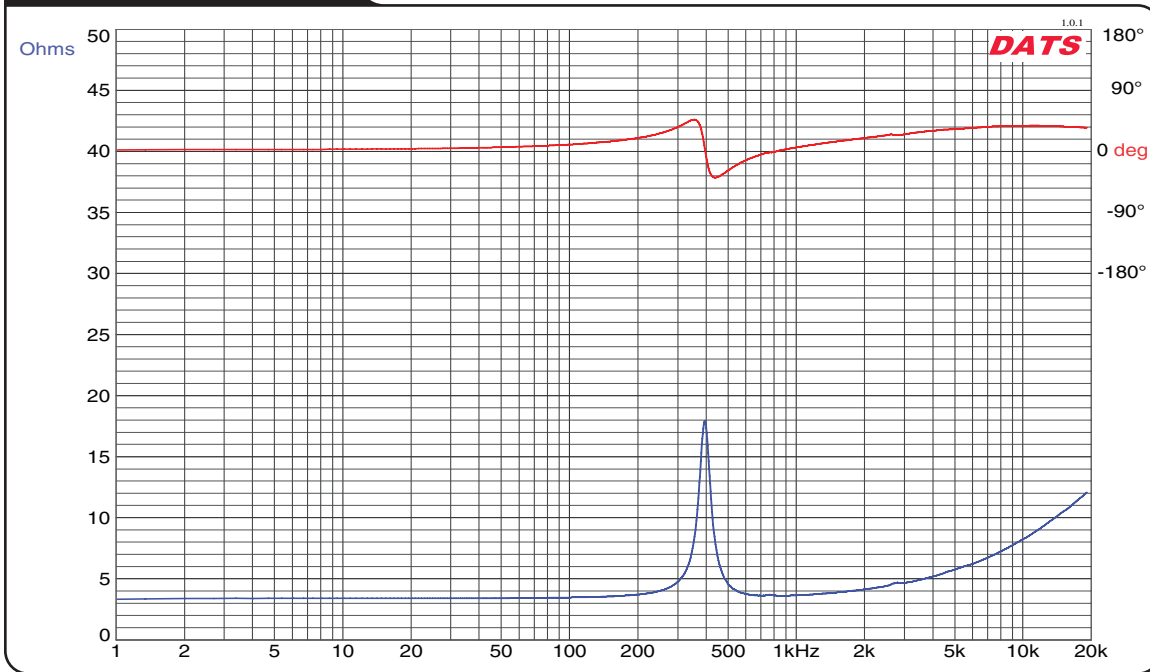

**Parameters**

Impedance ( $\Omega$ )	4
Re ( $\Omega$ )	3.3
Le (mH) @ 1 kHz	0.21
Fs (Hz) - Uncoupled	395
Qms	—
Qes	—
Qts	1.38
Mms (g)	5.4
Cms (mm/N)	0.08
Sd (cm <sup>2</sup> )	—
Vd (cm <sup>3</sup> )	—
BL (Tm)	4.2
VAS (liters)	—
XMAX (mm)	—
VC Diameter (mm)	32
Net Weight (g)	148
RMS Power Handling (W)	40
Usable Frequency Range (Hz)	*