

### PARAMETERS

Impedance	8 ohms
Re	7 ohms
Le	0.47 mH @ 1 kHz
Fs	240 Hz
Qms	N/A
Qes	N/A
Qts	1.98
Mms	9.95 g
Cms	.05 mm/N
Sd	N/A
Vd	N/A
BL	5.0 Tm
Vas	N/A
Xmax	N/A
VC Diameter	32 mm
SPL	N/A
RMS Power Handling	25 watts
Usable Frequency Range (Hz)	60 - 12,000 Hz (varies by application)


### FEATURES

- Super small size with low profile height
- 8 ohms impedance for use in almost any amplifier
- Includes mounting plate
- Adds sound to any surface

### APPLICATIONS


- Invisible home theater and multi-room audio
- Electronic gaming machines
- Advertising signage
- Point-of-purchase displays
- Multimedia exhibits
- Commercial distributed audio
- Kiosks
- Automotive audio
- Bathroom tubs and showers

### IMPEDANCE/PHASE

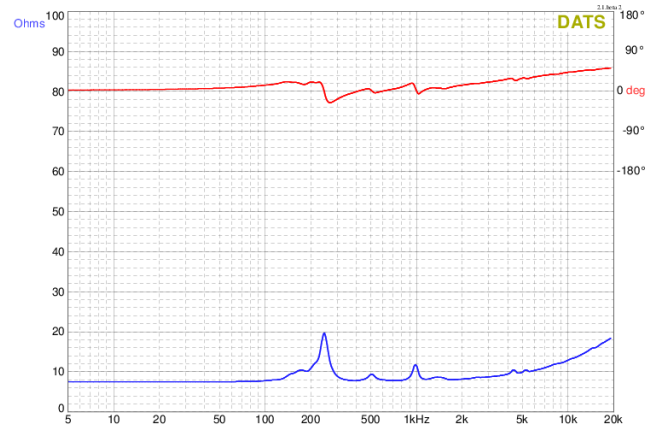

Measurement taken with transducer uncoupled facing upward.

### FREQUENCY RESPONSE

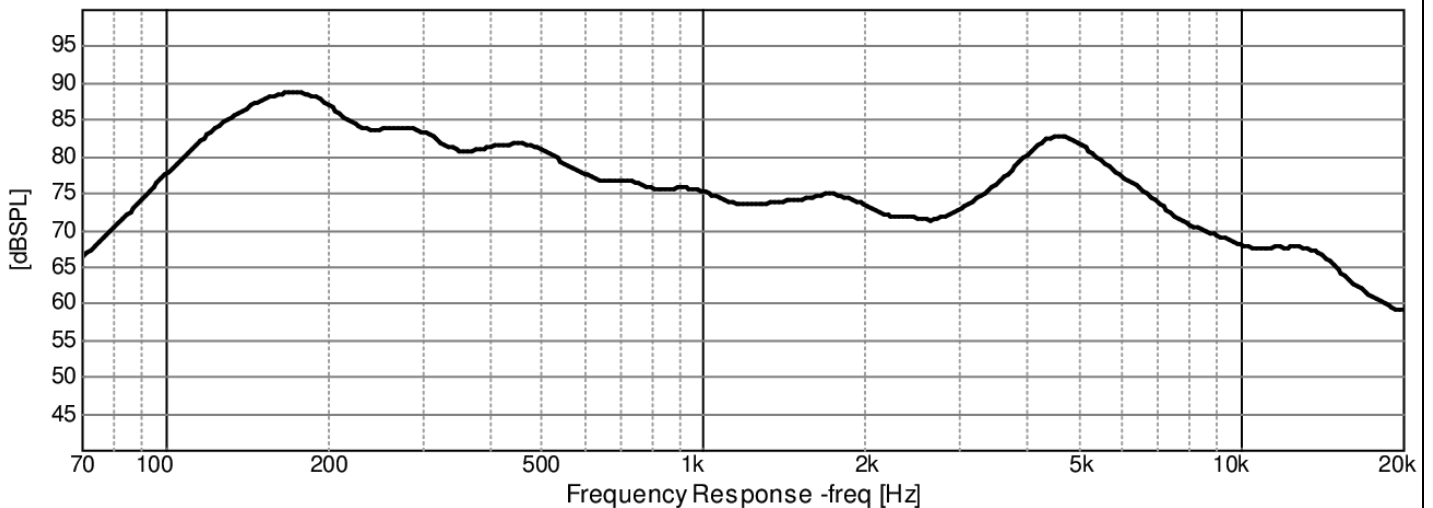

OmniMic

1/3<sup>rd</sup> octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.