




Features

- Small-format, high performance planar tweeter
- Housing designed for recessed or surface mount
- Low-mass Kapton diaphragm with aluminum conductor
- Highly detailed and dynamic output
- Excellent treble extension and off-axis response

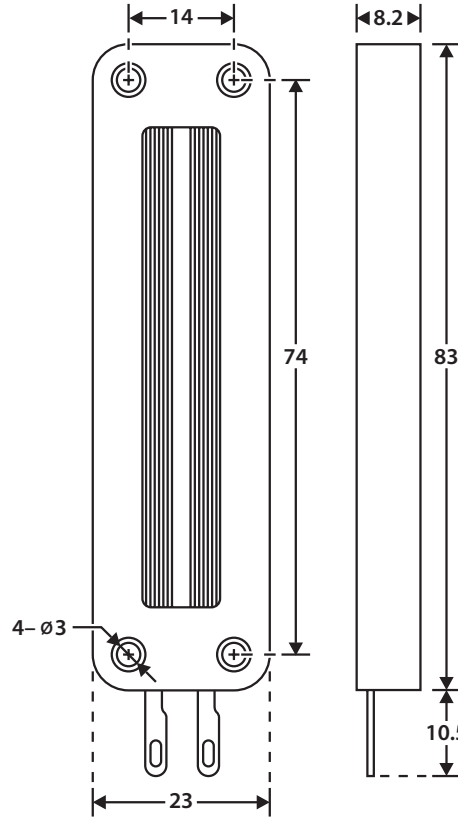


Note: All dimensions in mm.

Parameters

Impedance (Ω)	6
Re (Ω)	5.85
Le (mH) @ 1 kHz	0.0
Fs (Hz)	4460
Qms	—
Qes	—
Qts	1.74
Mms (g)	—
Cms (mm/N)	—
Sd (cm ²)	5.4
Vd (cm ³)	—
BL (Tm)	—
VAS (liters)	—
XMAX (mm)	—
VC Diameter (mm)	—
SPL (dB 2.83V/1m)	90
RMS Power Handling (w)	15
Usable Frequency Range (Hz)	2,900-25,000

Frequency Response

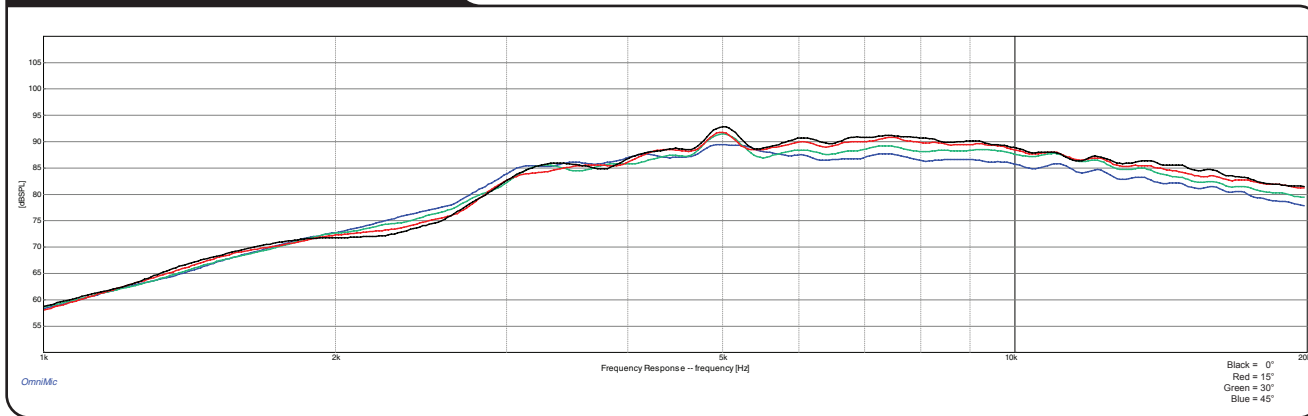

Impedance/Phase

