


MODULE


T1-1942S

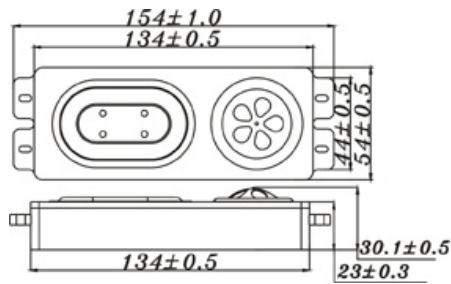

- TOTAL SOLUTION FOR AUDIO DESIGN
- COMBINE DRIVER, PASSIVE RADIATOR AND BOX AS ONE UNIT, PATENTED
- SLIM AND TINY, LOW BASS FO=78 Hz
- MODULE COULD BE RESHAPED TO FIT CUSTOMER'S APPLICATION
- GOOD FOR PORTABLE, SOUNDBAR, MULTIMEDIA...APPLICATION
- MOUNTING KIT WITH AMPLIFIER IS AVAILABLE.

SYSTEM SPECIFICATION

SYSTEM	Passive radiator design
ACTIVE DRIVER	46 mm dome shape driver
DIAPHRAGM	PP composite with elastomer
HOUSING	PP composite material
FINISH	Black
DIMENSIONS	154*54*30.1mm
VOICE COIL DIAMETER	28 mm
IMPEDANCE	4 ohm
POWER LOADING	4 W(RMS)
MUSIC POWER	8 W
RESPONSE RANGE	78Hz - 20KHz
SENSITIVITY	82 dB (M/W)
FO	78 Hz
POWER RECOMMENDED	5W (RMS)
DESIGN SUGGESTION	High pass filter with 80Hz, -12dB/oct

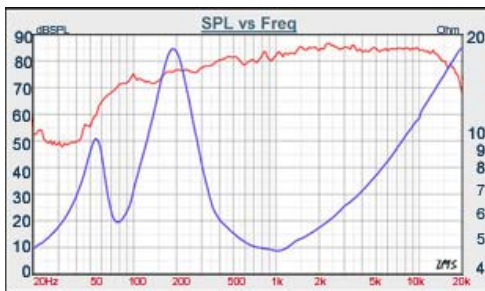

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

