


- FULL RANGE SPEAKER DESIGN
- OUTSIDE DIAMETER OF 43mm, Fo:120Hz
- ALUMINUM DIAPHRAGM WITH SANTOPRENE SURROUND
- NEODYMIUM MAGNET SYSTEM
- THE BEST CONSISTENCY, THE HIGHEST C/P VALUE
- IT'S GOOD FOR MULTIMEDIA APPLICATION

1" ALUM, FULL RANGE

DIAPHRAGM MTL	Aluminium
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.5 Ω
SENSITIVITY 1W/1m	80 dB
FREQUENCY RESPONSE	120-20K Hz
VOICE COIL DIAMETER	28 mm
AIR GAP HEIGHT	2.5 mm
RATED POWER INPUT	4 W
MAXIMUM POWER INPUT	8 W
FORCE FACTOR, BL	2.71 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	1.15 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1487 μMN^{-1}
EFFEC.PISTON AREA	0.0009 M^2
Levc	0.049 mH
Zo	18 ohm
X-max	1.25 mm
Vas	0.17 Litr.
Qts	0.34
Qms	1.82
Qes	0.42

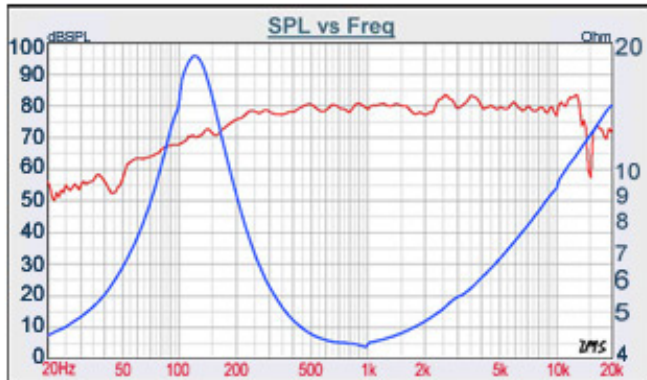

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com