


- FULL RANGE SPEAKER DESIGN
- OUTSIDE DIAMETER OF 25mm, Fo:200Hz
- PP CONE WITH SANTOPRENE SURROUND
- NEODYMIUM MOTOR SYSTEM
- THE BEST CONSISTENCY, THE HIGHEST C/P VALUE
- IT'S GOOD FOR MULTIMEDIA APPLICATION

1" PP CONE, FULL RANGE

DIAPHRAGM MTL	Mineral filled PP
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 W
DCR IMPEDANCE	3.5 W
SENSITIVITY 1W/1m	73 dB
FREQUENCY RESPONSE	200-20K Hz
FREE AIR RESONANCE	200 Hz
VOICE COIL DIAMETER	13.28 mm
AIR GAP HEIGHT	1.5 mm
RATED POWER INPUT	2 W
MAXIMUM POWER INPUT	4 W
FORCE FACTOR, BL	1.47 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	0.34 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	201 $\mu\text{MN}^{-1}$
EFFEC.PISTON AREA	0.00023 $\text{M}^2$
Levc	0.015 mH
Zo	7.50 ohm
X-max	0.75 mm
Vas	0.015 Liter.
Qts	0.35
Qms	0.74
Qes	0.68

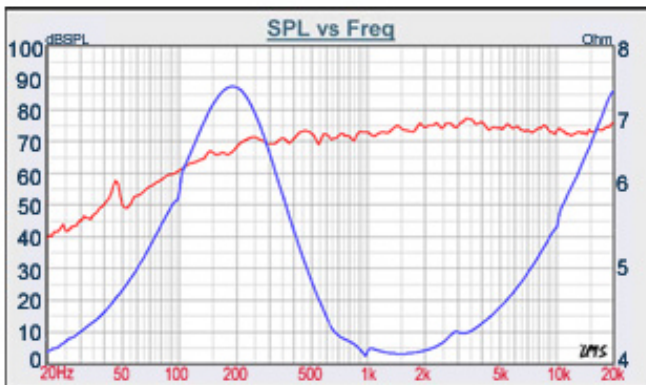

# TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com