


- FULL RANGE FREQUENCY DESIGN
- VERY WIDE DISPERSION PERFORMANCE
- FLAT ALUMINUM SANDWICH CONE
- NEODYMIUM MAGNET SYSTEM
- VERY LOW 2nd AND 3rd DISTORTION
- IT'S GOOD FOR FULL RANGE OR MID-RANGE APPLICATION

3" SANDWICH FULL RANGE / MID RANGE

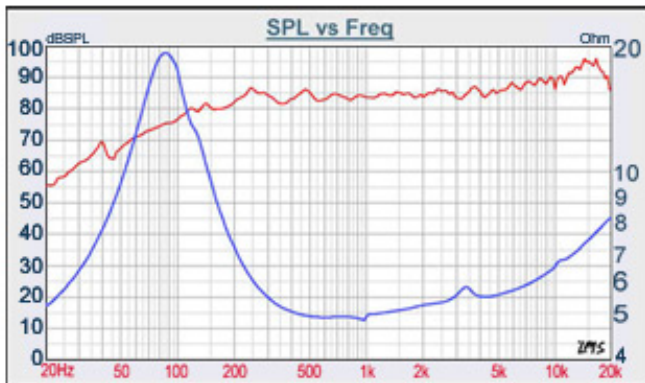

DIAPHRAGM MTL	SANDWICH
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1m	85 dB
FREQUENCY RESPONSE	90-20K Hz
FREE AIR RESONANCE	90 Hz
VOICE COIL DIAMETER	32 mm
AIR GAP HEIGHT	8 mm
RATED POWER INPUT	15 W
MAXIMUM POWER INPUT	30 W
FORCE FACTOR, BL	4.72 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	4.04 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	848.98 μMN ⁻¹
EFFEC.PISTON AREA	0.0032 M ²
L _{vc}	0.015 mH
Z _o	18 ohm
X-max	1 mm
V _{as}	1.23 Litr.
Q _{ts}	0.29
Q _{ms}	1.54
Q _{es}	0.35