


- FULL RANGE DESIGN
- UNDERHUNG MOTOR DESIGN WITH NEO MAGNET,  $X_{max}=4mm$
- VERY LOW THD(2nd AND 3rd HARMONIC DISTORTING)
- UNIQUE PHASE PLUG FOR BETTER DISPERSION
- BAMBOO FIBER PAPER CONE WITH DURABLE FOAM RUBBER SURROUND

## 3" PAPER FULL RANGE

DIAPHRAGM MTL	Paper
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.5 Ω
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	75-20K Hz
FREE AIR RESONANCE	75 Hz
VOICE COIL DIAMETER	20.4 mm
AIR GAP HEIGHT	12 mm
RATED POWER INPUT	12 W
MAXIMUM POWER INPUT	25 W
FORCE FACTOR, BL	4.30 TM
MAGNET WEIGHT ( oz)	Neodymium
MOVING MASS	2.0 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	2117 $\mu MN^{-1}$
EFFEC.PISTON AREA	0.0032 M <sup>2</sup>
Levc	0.023 mH
Zo	38 ohm
X-max	4.2 mm
Vas	3.08 Litr.
Qts	0.28
Qms	1.67
Qes	0.34

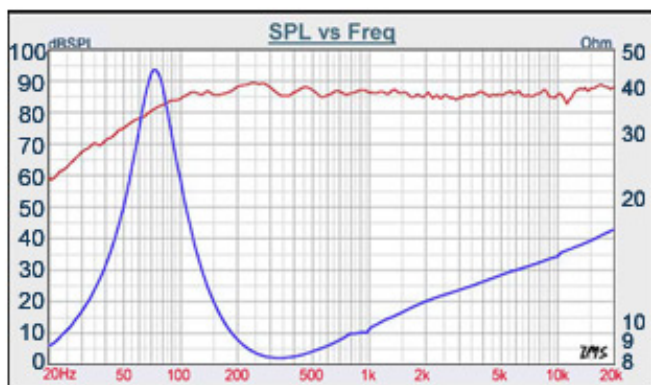

VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com