


- HIGH POWER LOADING DESIGN
- NEODYMIUM MOTOR STRUCTURE, VENTED POLE PIECE
- STAMPED STEEL BASKET, MAGNETICALLY SHIELDED
- PP INJECTION CONE WITH LOW LOSS OF FOAM RUBBER SURROUND
- GOOD FOR IN-WALL, CAP SPEAKER, SUBWOOFER APPLICATION
- VERY SHALLOW DESIGN, EFFECTIVE HEIGHT OF 67 mm

8" SUBWOOFER

DIAPHRAGM MTL	PP Injection
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.4 Ω
SENSITIVITY 1W/1m	86 dB
FREQUENCY RESPONSE	37-350 Hz
FREE AIR RESONANCE	37 Hz
VOICE COIL DIAMETER	49.5 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	100 W
MAXIMUM POWER INPUT	200 W
FORCE FACTOR, BL	13.01 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	69.85 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	259.28 μMN^{-1}
EFFEC.PISTON AREA	0.022 M^2
Levc	0.543 mH
Zo	65 ohm
X-max	5.25 mm
Vas	17.82 Liter.
Qts	0.31
Qms	5.95
Qes	0.33

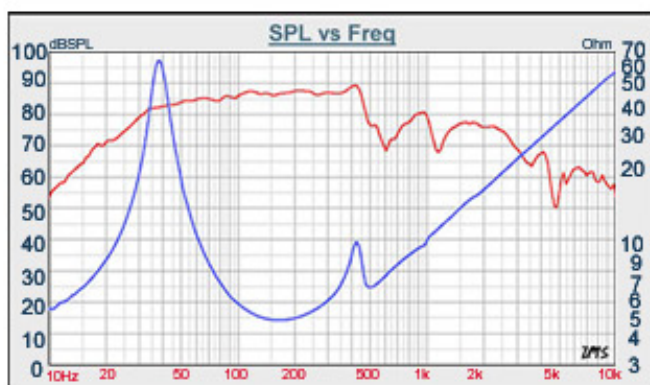

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com