
## **DMA58-PR 2" DMA Series Passive Radiator**



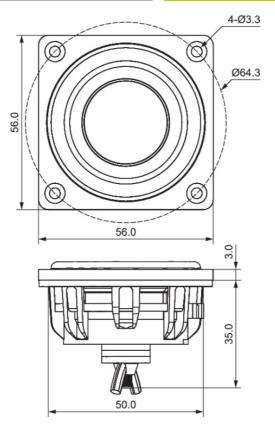

## **FEATURES**

- Perfect match for the Dayton Audio DMA series drivers
- Allows tuning small enclosures lower than possible using conventional ports
- Rear mounted threaded post allows easy mass adjustment for custom tuning
- DIY friendly, oversized mounting flange makes installation simple

| PARAMETERS |                      |
|------------|----------------------|
| Fs         | 39.8 Hz              |
| Qms        | 3.93                 |
| Mms        | 6.7 g                |
| Cms        | 2.4 mm/N             |
| Sd         | 14.5 cm <sup>2</sup> |
| Vd         | 0.010 liters         |
| Vas        | 0.71 liters          |
| Xmax       | 7 mm                 |
| Rms        | 0.43 kg/s            |

 $\textbf{Note:} \ \mathsf{Parameters} \ \mathsf{above} \ \mathsf{are} \ \mathsf{for} \ \mathsf{the} \ \mathsf{passive} \ \mathsf{only} \ \mathsf{with} \ \mathsf{no} \ \mathsf{additional} \ \mathsf{mass} \ \mathsf{added}.$