
## 

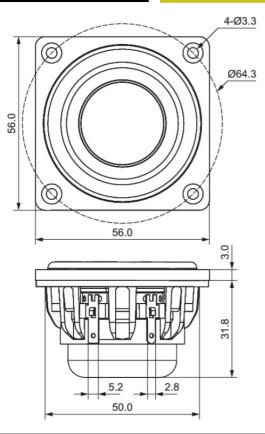

## FEATURES

- Excellent high frequency response for true full-range applications Dual neodymium motor to create a symmetrical magnetic field for ٠
- superb control Large copper cap lowers distortion while improving high frequency
- response Vented aluminum voice coil former with exceptional heat dissipation
- for high power handling Exclusive 8-spoke open frame design provides extensive venting
- and minimal reflection DIY friendly, oversized mounting flange makes installation simple •
- Matching tunable passive radiators also available! •

## DMA58-4 2" Dual Magnet Aluminum Cone Full-Range Driver 4 Ohm

PARAMETERS	
Impedance	4 ohms
Re	3.6 ohms
Le	0.2 mH @ 1 kHz
Fs	165.5 Hz
Qms	2.4
Qes	0.56
Qts	0.46
Mms	2.1 g
Cms	0.45 mm/N
Sd	14.5 cm <sup>2</sup>
Vd	2.9 cm <sup>3</sup>
BL	3.7 Tm
Vas	0.005 ft <sup>3</sup>
Xmax	2.0 mm
VC Diameter	1"
SPL	86.2 dB @ 2.83V/1m
RMS Power Handling	15 watts
Usable Frequency Range (Hz)	160-20,000 Hz

