


1" ALUM, FULL RANGE

- FULL RANGE SPEAKER DESIGN
- OUTSIDE DIAMETER OF 31mm, Fo:170Hz
- ALUMINUM DIAPHRAGM WITH SANTOPRENE SURROUND
- NEODYMIUM MAGNET SYSTEM
- THE BEST CONSISTENCY, THE HIGHEST C/P VALUE
- IT'S GOOD FOR MULTIMEDIA APPLICATION

| | |
|----------------------|---------------------------|
| DIAPHRAGM MTL | Aluminium |
| SURROUND MTL | Santoprene |
| NOMINAL IMPEDANCE | 4 Ω |
| DCR IMPEDANCE | 3.6 Ω |
| SENSITIVITY 1W/1m | 73 dB |
| FREQUENCY RESPONSE | 170-18K Hz |
| FREE AIR RESONANCE | 170 Hz |
| VOICE COIL DIAMETER | 19.4 mm |
| AIR GAP HEIGHT | 1.5 mm |
| RATED POWER INPUT | 3 W |
| MAXIMUM POWER INPUT | 5 W |
| FORCE FACTOR, BL | 2.0 TM |
| MAGNET WEIGHT (oz) | Neodymium |
| MOVING MASS | 0.998 g |
| FERRO FLUID ENHANCED | No |
| SUSPENSION COMPL. | 919.049 μMN ⁻¹ |
| EFFEC.PISTON AREA | 0.00045 M ² |
| Levc | 0.086 mH |
| Zo | 18 ohm |
| X-max | 1.25 mm |
| Vas | 0.26 Litr. |
| Qts | 0.77 |
| Qms | 4.13 |
| Qes | 0.94 |

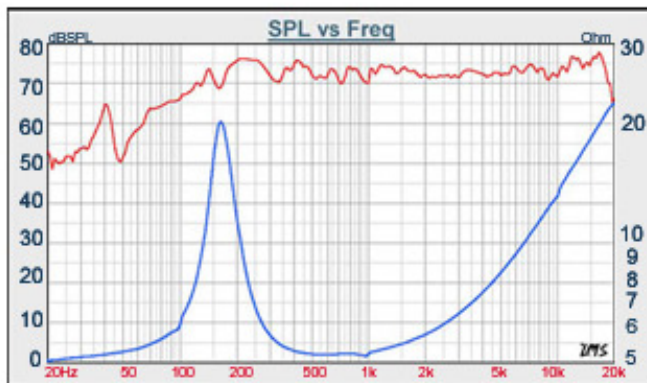

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com