


## 3" PAPER CONE/ FULL RANGE

- UNDERHUNG DESIGN SYSTEM
- CCAW / KAPTON BOBBIN
- FULL RANGE FREQUENCY RESPONSE
- STAMPING STEEL BASKET
- PAPER CONE WITH SANTOPRENE SURROUND
- MAGNETICALLY SHIELDED
- ALUMINUM PHASE PLUG COOLING

DIAPHRAGM MTL	Silver Color Coated paper
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.6 Ω
SENSITIVITY 1W/1m	86 dB
FREQUENCY RESPONSE	110-20K Hz
FREE AIR RESONANCE	110 Hz
VOICE COIL DIAMETER	18.4 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	12 W
MAXIMUM POWER INPUT	25 W
FORCE FACTOR, BL	3.6 TM
MAGNET WEIGHT (4.1oz)	115 g
MOVING MASS	2 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1133MN <sup>-1</sup>
EFFEC.PISTON AREA	0.0032M <sup>2</sup>
Levc	0.097mH
Zo	56ohm
X-max	0.5 mm
Vas	1.65 Litr.
Qts	0.59
Qms	4.97
Qes	0.67

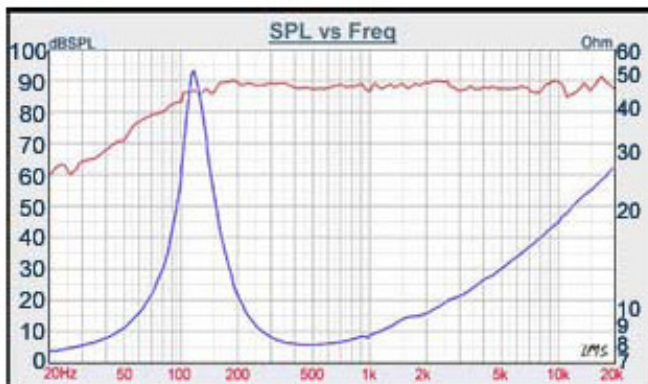

VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com